(12) UK Patent Application (19) GB (11) 2 316 037 (13) A

(21) Application No 9716371.1

(22) Date of Filing 01.08.1997

(30) Priority Data
(31) 08220656 (32) 02.08.1996 (33) JP
08231504 13.08.1996
08247294 28.08.1996

(71) Applicant(s)
Seiko Epson Corporation

(Incorporated in Japan)

4-1 Nishi-shinjuku 2-chome, Shinjuku-ku, Tokyo,
Japan

(72) Inventor(s)
Kazumichi Shimada
Takao Kobayashi
Hisashi Miyazawa

(51) INT CL⁶
B41J 2/175 , H04N 1/405

(52) UK CL (Edition P)
B6F FLR
H4F FCH FS1 FS30K FS49S1

(56) Documents Cited
GB 2301064 A

(58) Field of Search
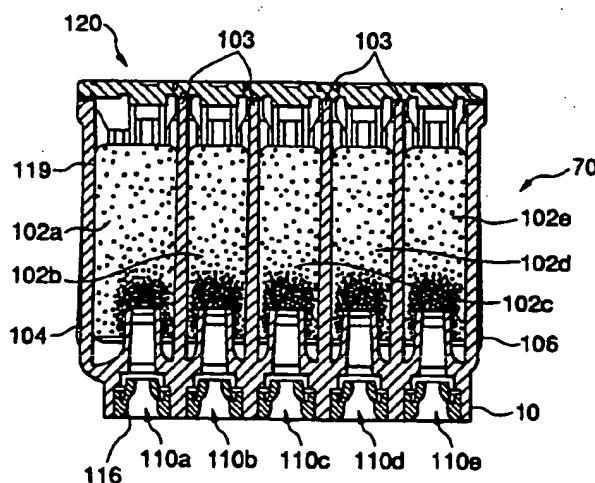UK CL (Edition O) B6F FLR
INT CL⁶ B41J 2/175

(74) Agent and/or Address for Service
J Miller & Co
34 Bedford Row, Holborn, LONDON, WC1R 4JH,
United Kingdom

(54) Ink cartridge having ink chambers of different volumes

(57) An ink cartridge 70 includes colour ink chambers 102a-e partitioned by walls 103 wherein the volume of chamber 102a is larger than the other chambers. Cylindrical ink supply ports 110 a-e having rubber seals 116 protrude from the bottom of the cartridge while being spaced at fixed intervals. Yellow ink is contained in chamber 102a and two types of high and low density colour inks of magenta and cyan are contained in the other chambers. Additionally, a printer is disclosed for printing two kinds of colour inks of different densities by a distribution of dots using a half-tone process which forms images free from graininess.

FIG.7

GB 2 316 037 A
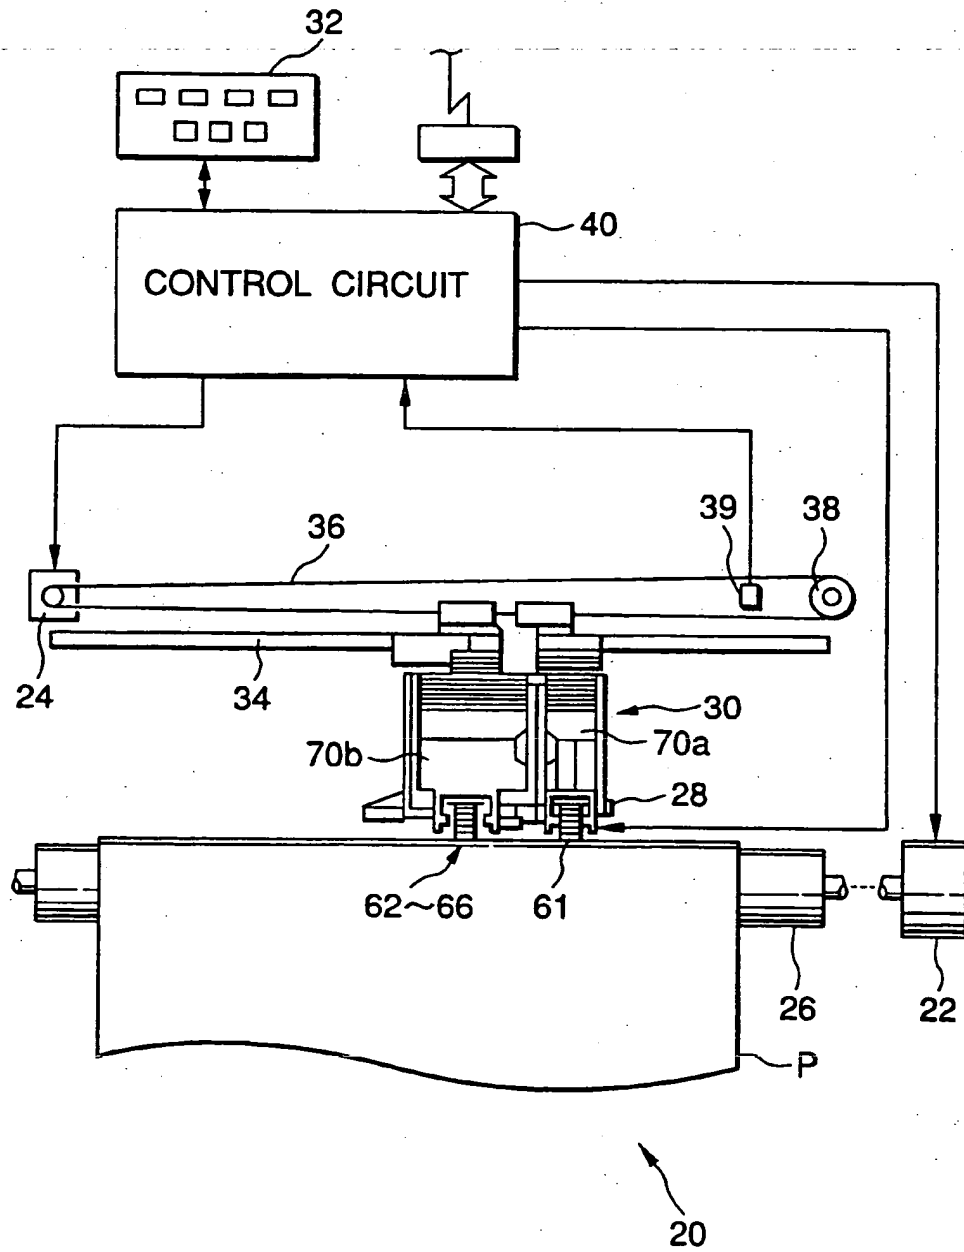
FIG.1

FIG.2
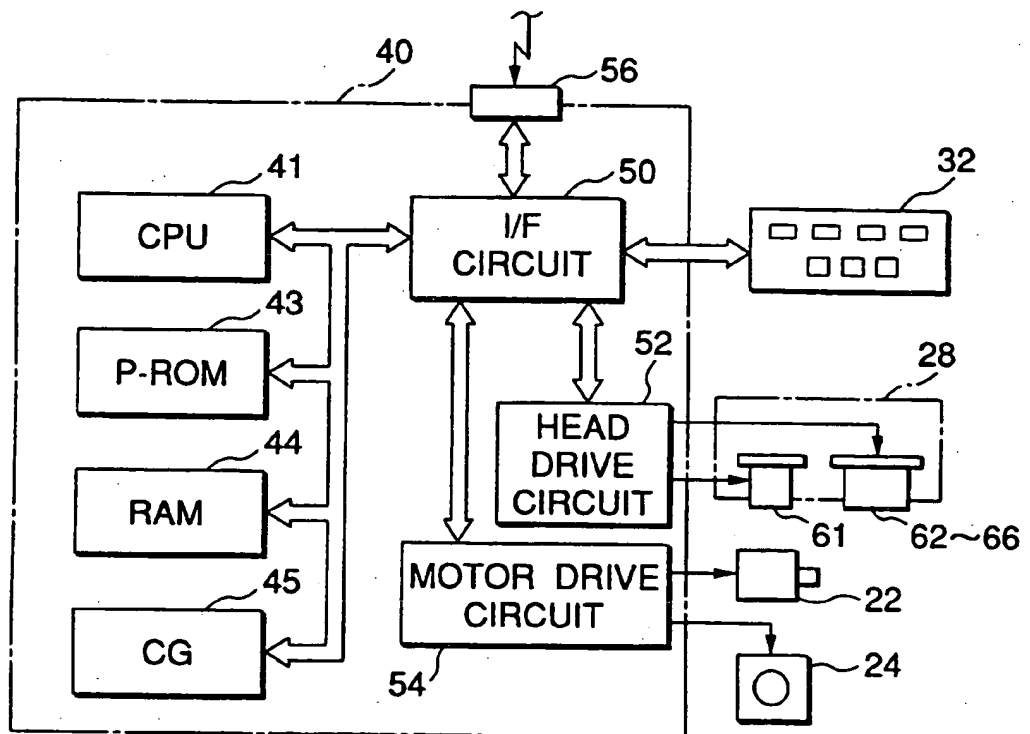
FIG.3
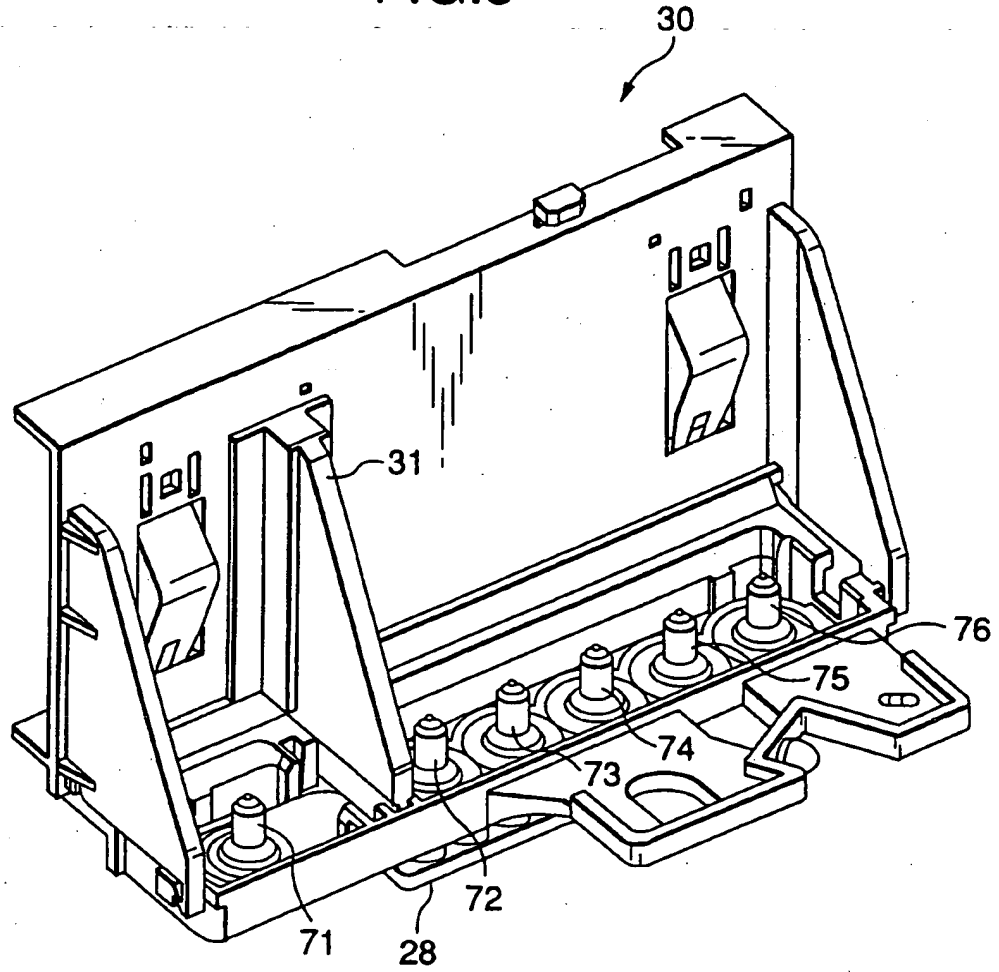
FIG.4

FIG.5

FIG.6

FIG.7

FIG.8

FIG.9

102a~102e

119

116d

116

C

110a~110e

116e

116c

116a

115

116b

FIG.10

110e

111

110d

112

112

113

110c

114

110b

110a 115 117
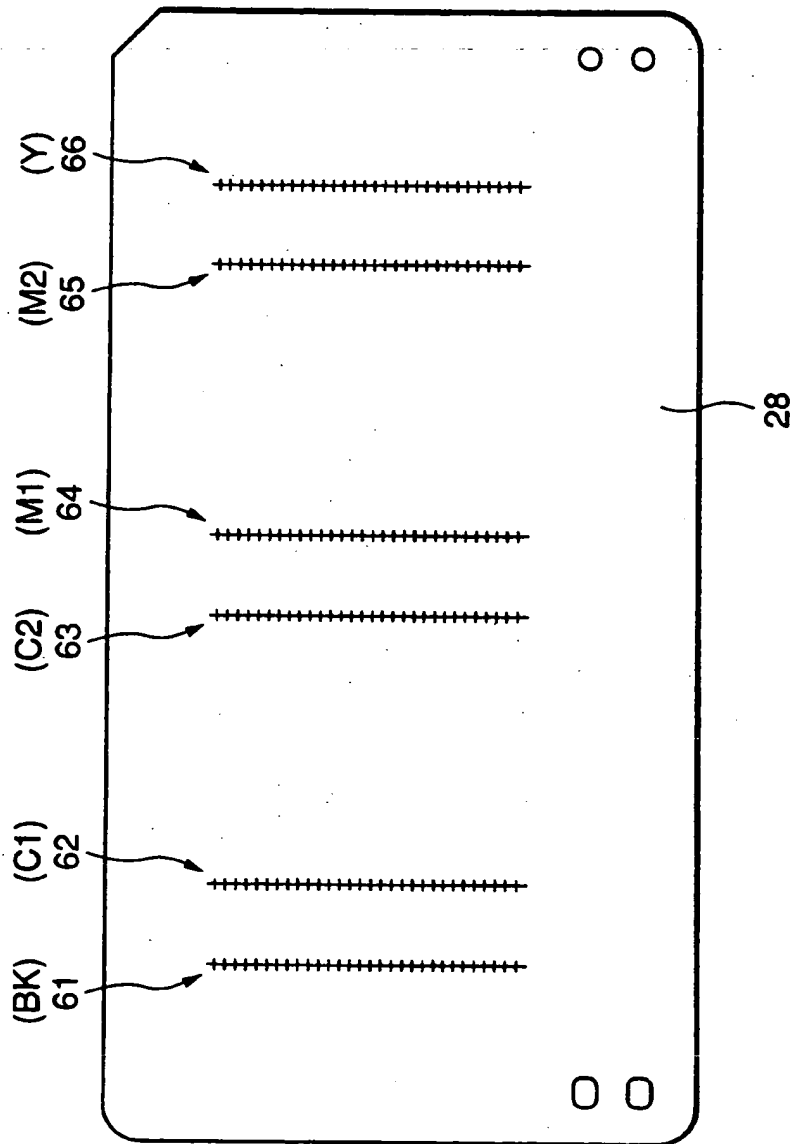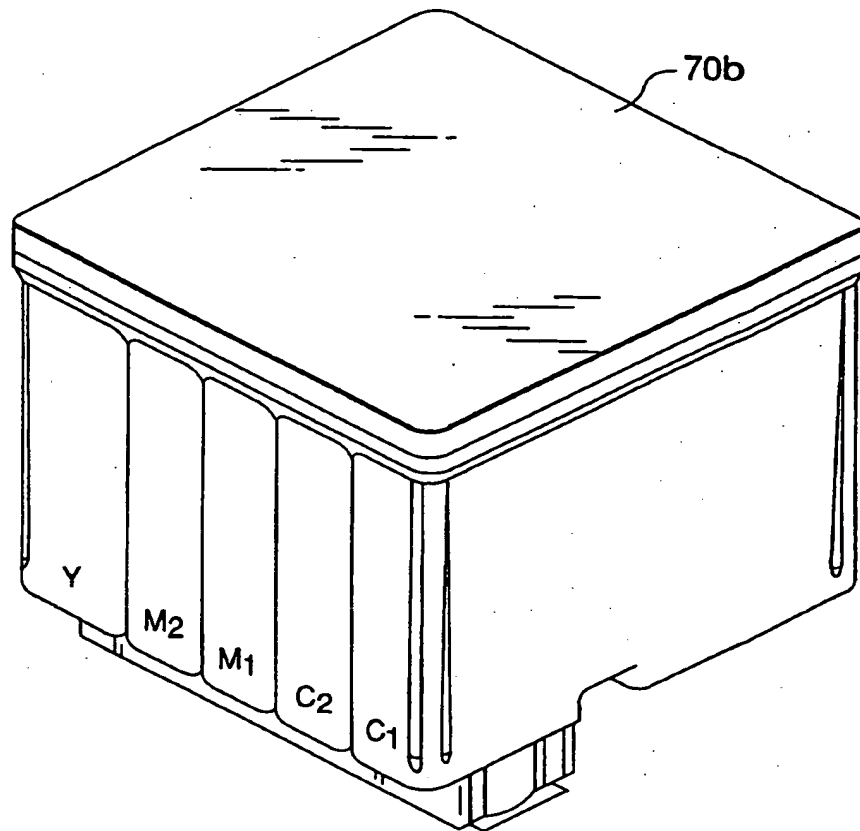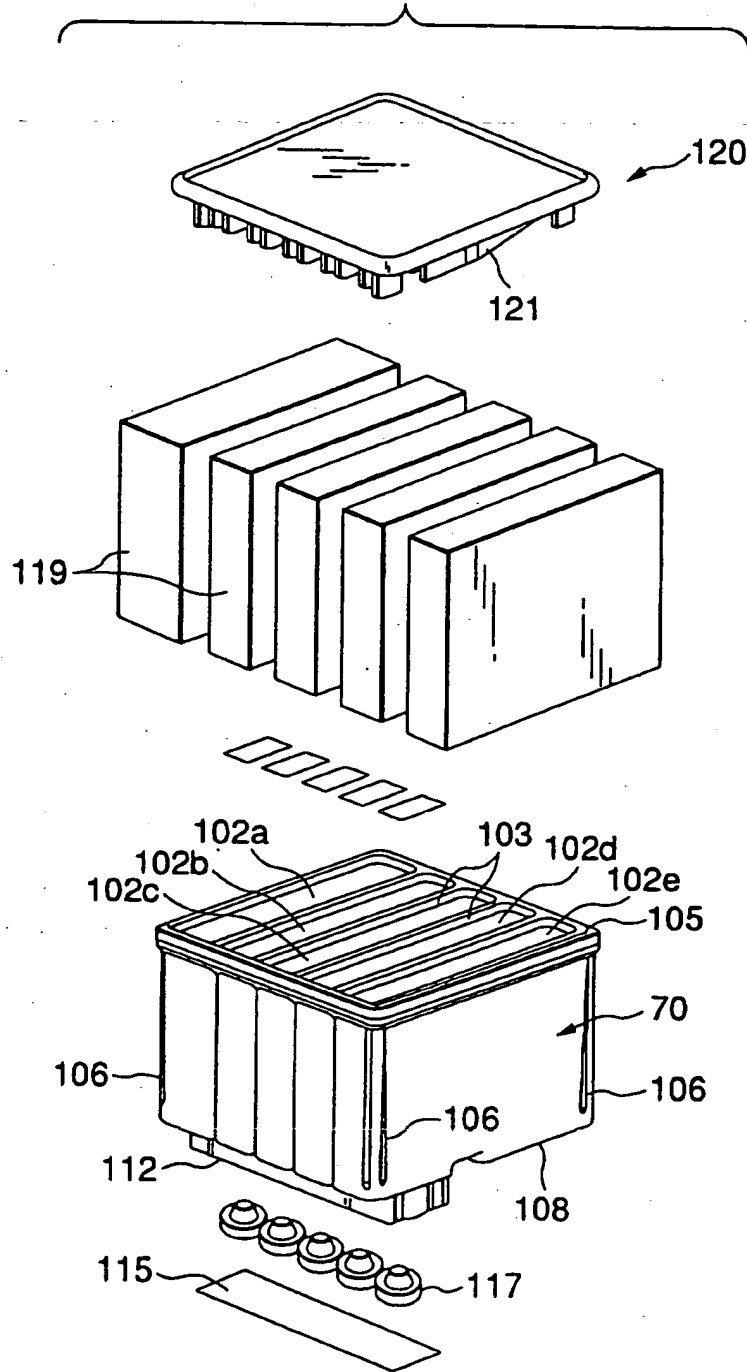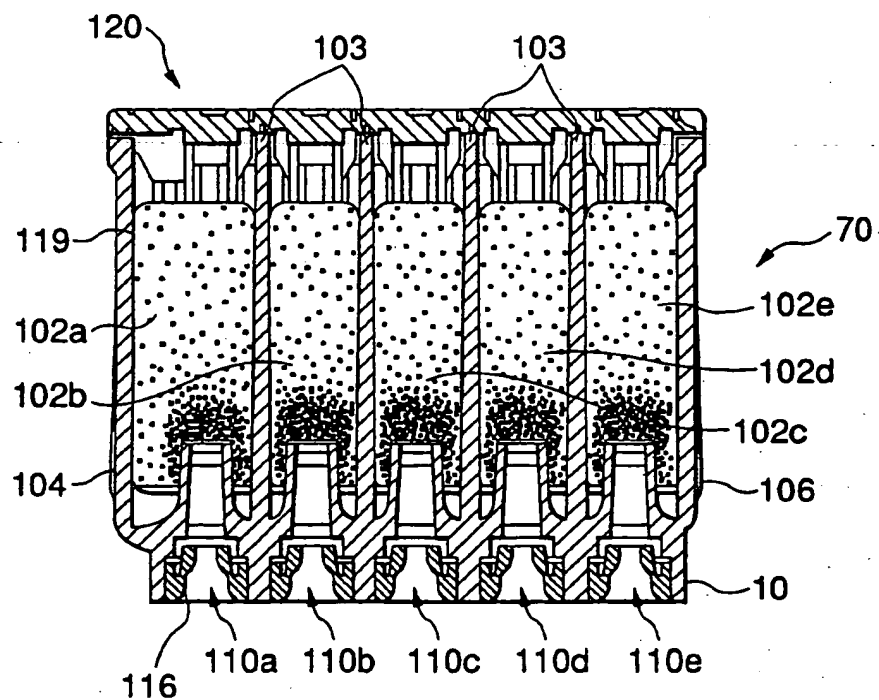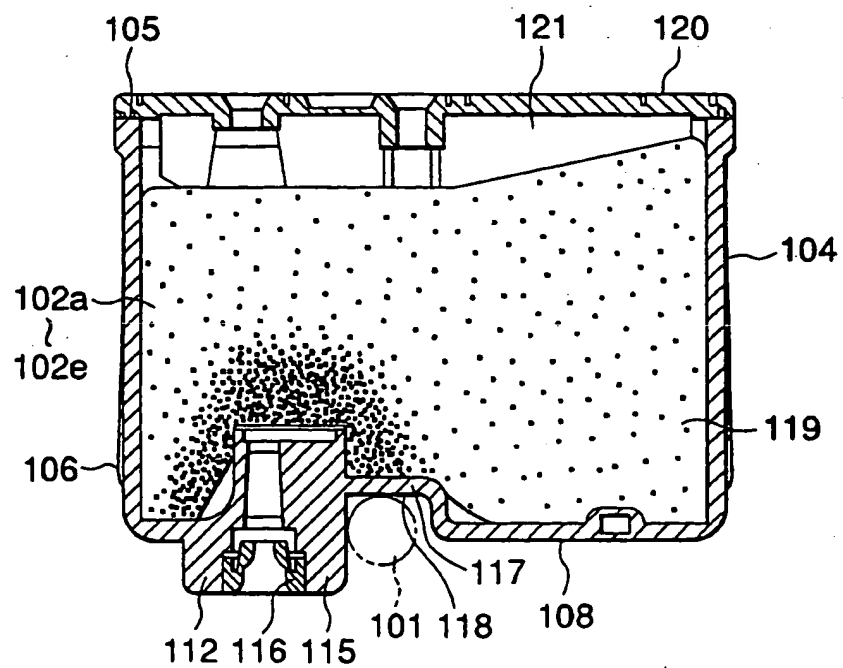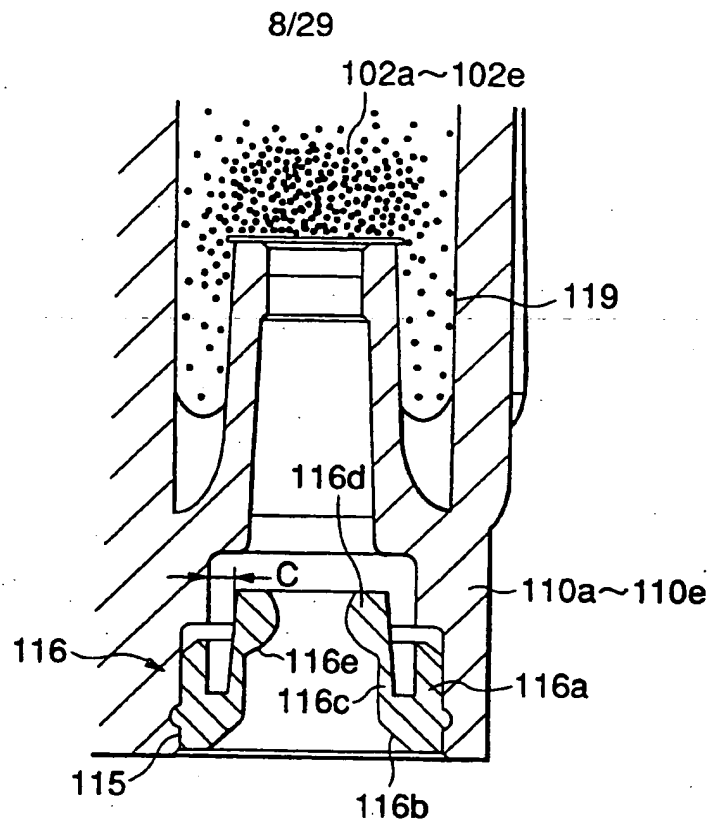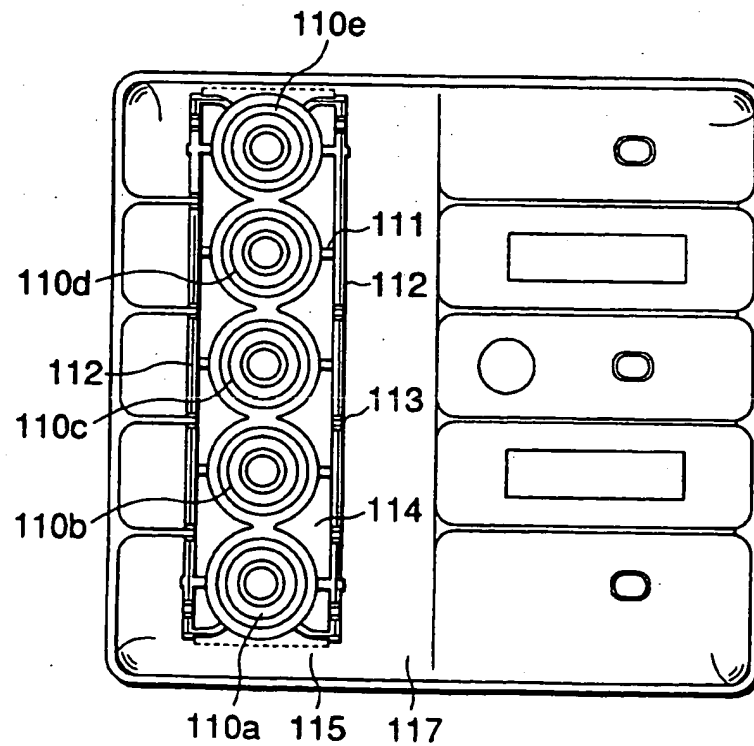
FIG.11(a)

FIG.11(b)

FIG.11(c)

FIG.12

FIG.13

70

71~76

28

61~66

PE

PE

n

FIG.14

PE

80

n

PE

80

IP
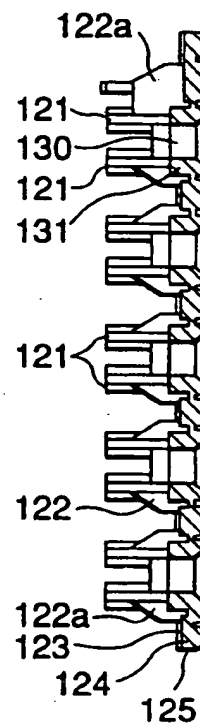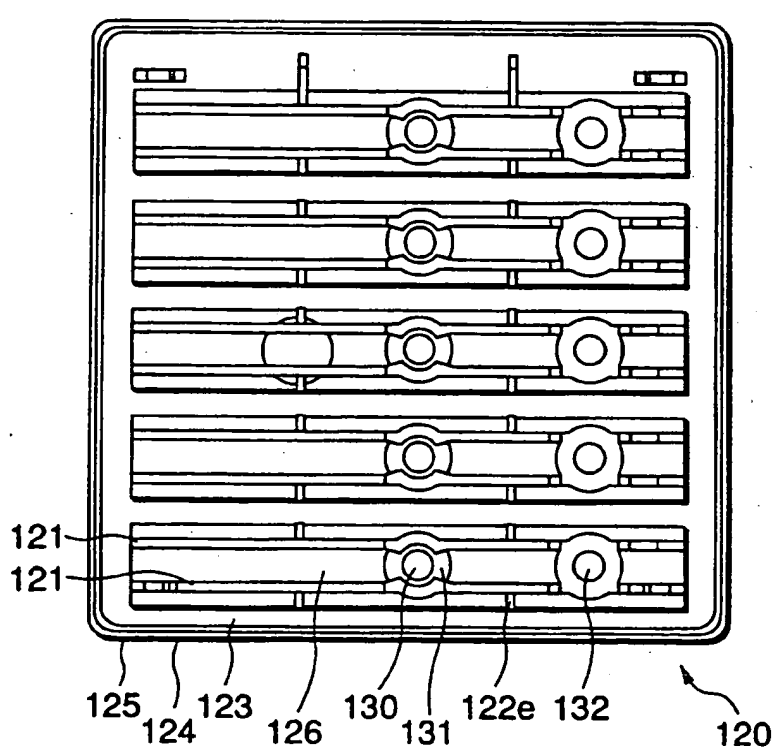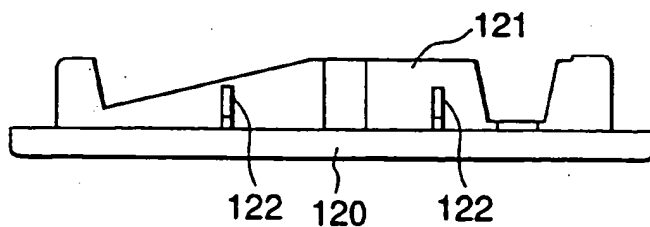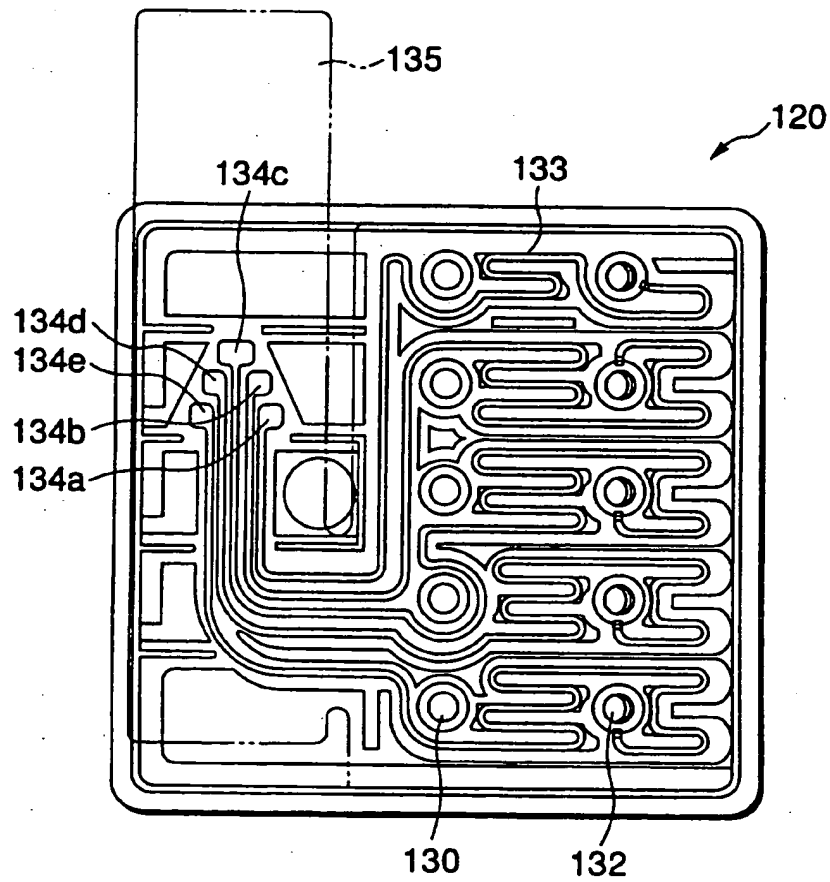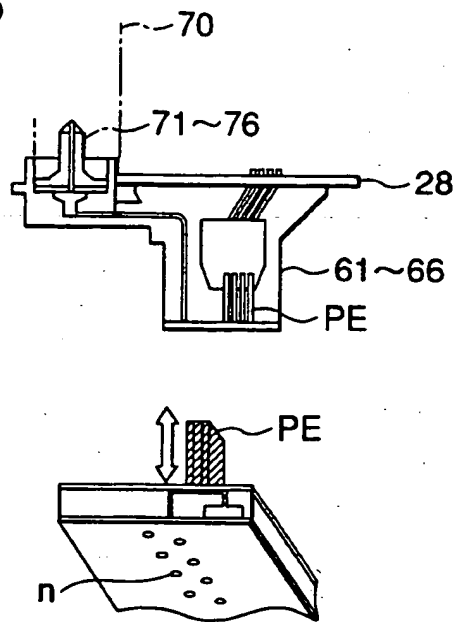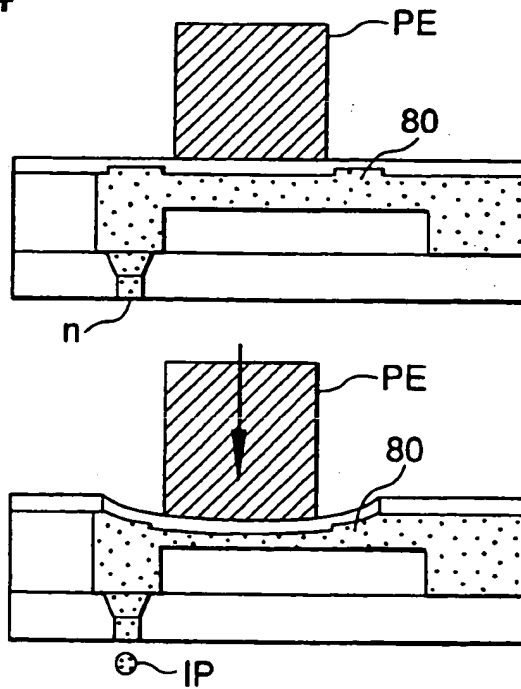
FIG.15
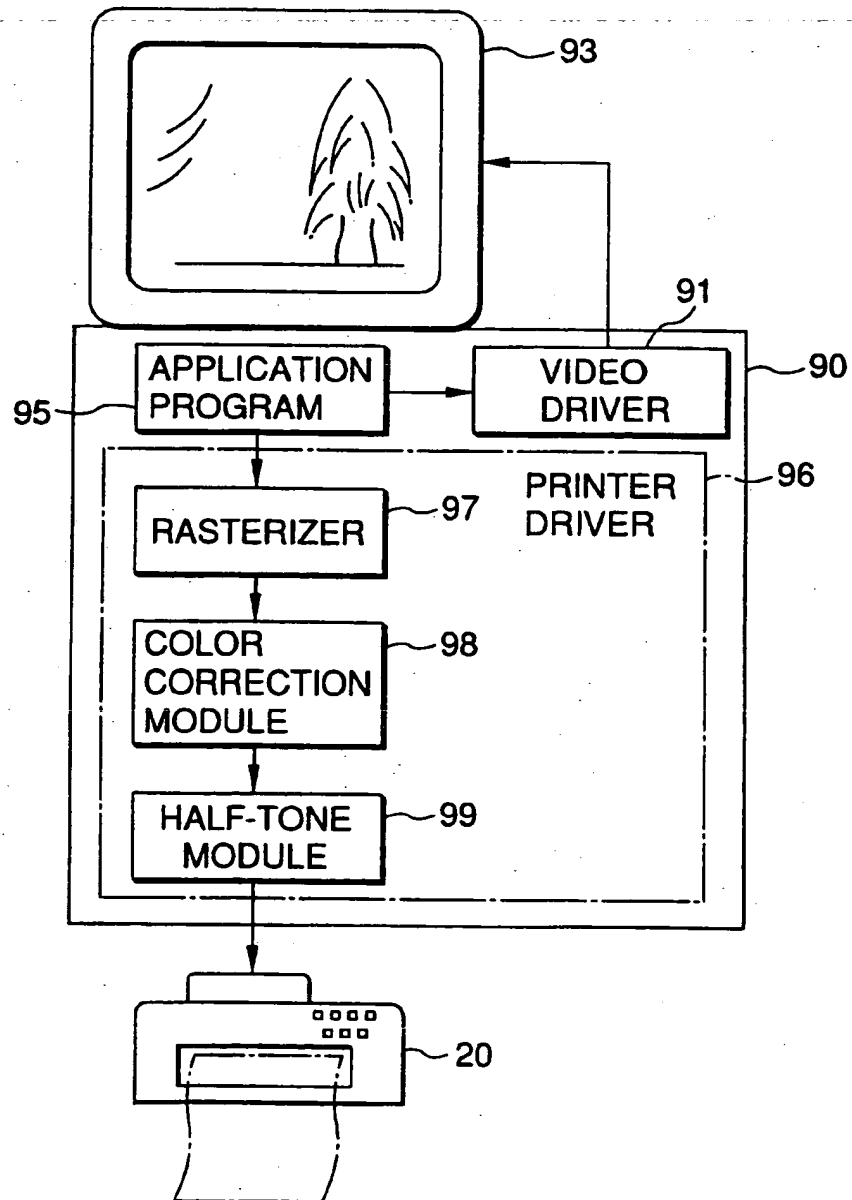
FIG.16

GRADIENTS AND AMOUNTS OF INKS

		C1	C2	M1	M2	Y	Bk
DYE	DIRECTBLUE199	3.6	0.9				
	ACIDRED289			2.8	0.7		
	DIRECTYELLOW86					1.8	
	FOODBLACK2						4.8
DIETHYLENE GLYCOL		30	35	20	25	30	25
SURFYNOL465		1	1	1	1	1	1
WATER		65.4	63.1	76.2	73.3	67.2	69.2
VISCOSITY (mPa·s)		3.0	3.0	3.0	3.0	3.0	3.0
AMOUNTS OF INKS (cc)		20	20	20	20	28	56

FIG.17

FIG.18

```
      ┌─────────────────────┐
      │     HALF-TONE        │
      │  PROCESS ROUTINE     │
      └─────────────────────┘
                 │
                 ▼
   ┌───────────────────────────┐
   │  INPUT TO PRINTER TONE     │──S100
   │  DATA DS OF PIXELS         │
   └───────────────────────────┘
                 │
                 ▼
   ┌───────────────────────────┐
   │ ON/OFF OF DEEP COLOR       │──S120
   │ DOT IS DETERMINED AND      │
   │ RESULT VALUE RV IS         │
   │ COMPUTED                   │
   └───────────────────────────┘
                 │
                 ▼
   ┌───────────────────────────┐
   │ CORRECTED DATA DC IS       │──S125
   │ OBTAINED AS THE SUM OF      │
   │ TONE DATA DS OF THE         │
   │ CURRENT TARGET PIXEL        │
   │ AND A DIFFUSION ERROR ΔDU   │
   │ DERIVED FROM THE ALREADY    │
   │ PROCESSED PIXEL LOCATED NEAR│
   │ TO THE FORMER               │
   └───────────────────────────┘
                 │
                 ▼
            ◇─────────────◇
           ╱ IS DEEP COLOR ╲──S130   NO
           ╲  DOT OFF ?    ╱─────────┐
            ◇─────────────◇          │
                 │ YES               │
                 ▼        ──S140     │
   ┌───────────────────────────┐     │
   │ ON/OFF OF LOW DENSITY      │     │
   │ DOT IS DETERMINED,         │     │
   │ AND A RESULT VALUE IS      │     │
   │ COMPUTED                   │     │
   └───────────────────────────┘     │
                 │◄──────────────────┘
                 ▼
   ┌───────────────────────────┐
   │   ERROR IS COMPUTED        │──S150
   │   E R R ←DC─RV             │
   └───────────────────────────┘
                 │
                 ▼
   ┌───────────────────────────┐
   │ ERROR DIFFUSION PROCESS    │──S160
   │      IS PERFORMED          │
   └───────────────────────────┘
                 │
                 ▼
      ┌─────────────────────┐
      │   GO TO NEXT PIXEL   │
      └─────────────────────┘
```

FIG.19

DEEP COLOR DOT
FOFRMING JUDGING
PROCESS ROUTINE

GENERATE DEEP LEVEL DATA
Dth ON THE BASIS OF THE
TONE DATA DS, WHILE
REFERRING TO THE TABLE
SHOWN IN FIG. 13 —S122

D th > D ref1
? —S124

DEEP COLOR DOT IS OFF
RV ← 0 —S128

DEEP COLOR DOT IS ON
RV ← f (Dth) —S126

NEXT

FIG.20

FIG.21

γ CORRECTION DATA

FIG.22

RELATIONSHIPS AFTER Γ-CORRECTION

FIG.23

DEEP LEVEL DATA

THRESHOLD MATRIX OF 4×4

ON/OFF OF
DEEP COLOR DOT

FIG.24

FIG.25

```
      ┌──────────────────────┐
      │  LIGHT COLOR DOT      │
      │ FORMING DETERMINING   │
      │  PROCESS ROUTINE      │
      └──────────────────────┘
                 │
                 ▼
            ╱─────────╲          S144
          ╱  DC > Dref2 ╲  NO
          ╲      ?      ╱─────────────┐
            ╲─────────╱               │            S148
                 │ YES                ▼
                 │          ┌──────────────────────┐
                 │          │ LIGHT COLOR DOT IS OFF│
                 │          │        RV ← 0         │
                 │          └──────────────────────┘
                 ▼                    │
      ┌──────────────────────┐        │
      │ LIGHT COLOR DOT IS ON │ S146   │
      │      RV ← g (DC)      │        │
      └──────────────────────┘        │
                 │◄───────────────────┘
                 ▼
           ┌───────────┐
           │   NEXT    │
           └───────────┘
```
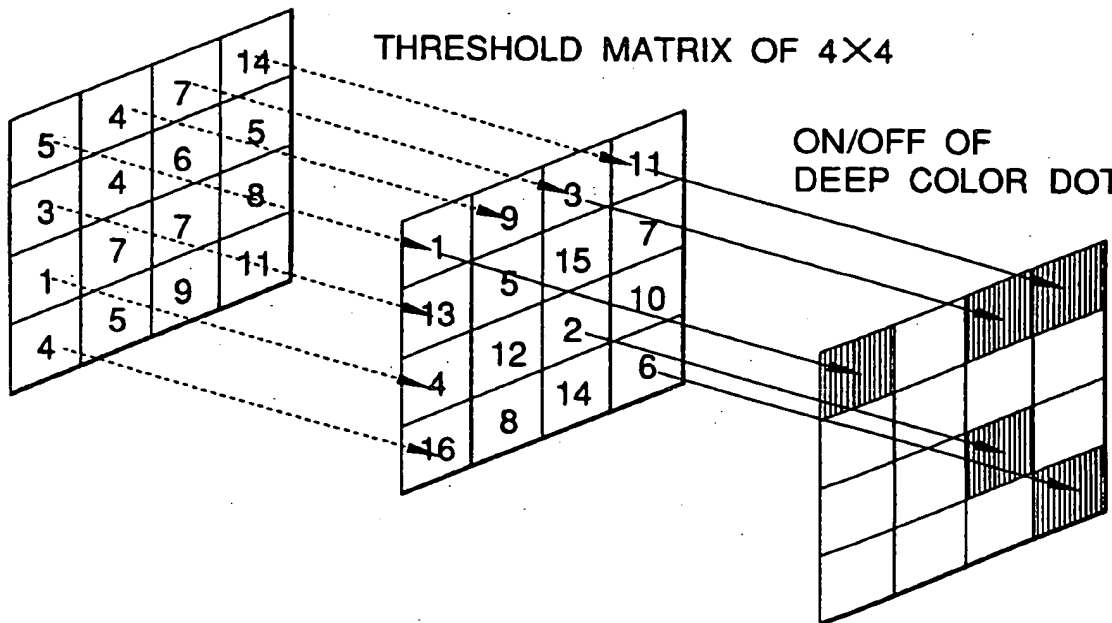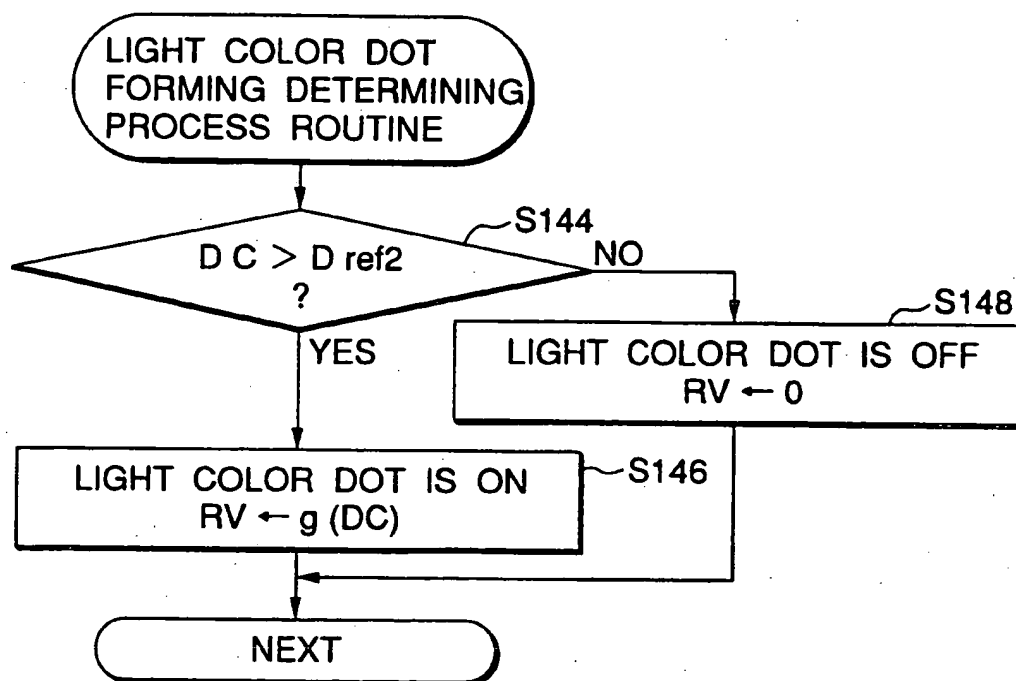
FIG.26

FIG.27(a)

FIG.27(b)

C_2

FIG.27(c)

FIG.27(d)

C_1

FIG.27(e)

FIG.27(f)

FIG.27(g)

FIG.27(h)

FIG.28
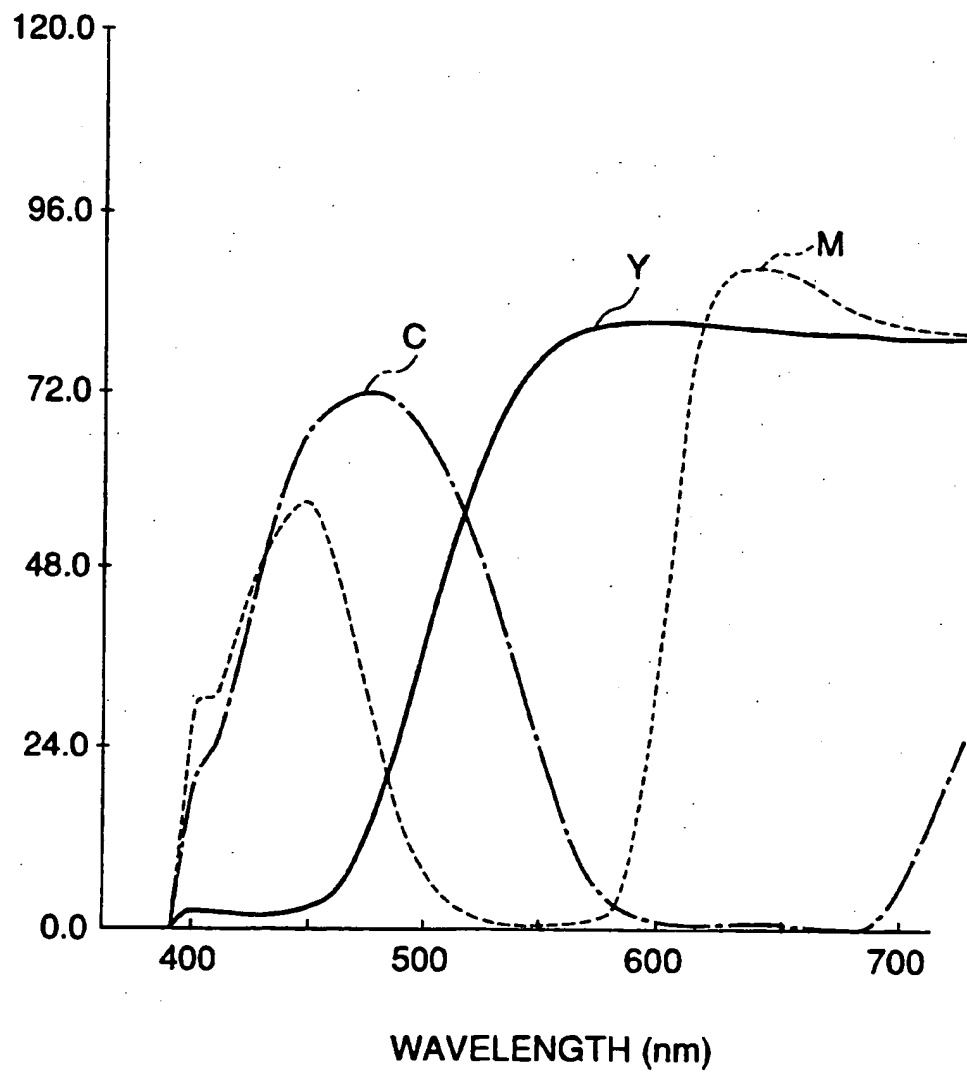
FIG.29(a)   FIG.29(b)

FIG.30

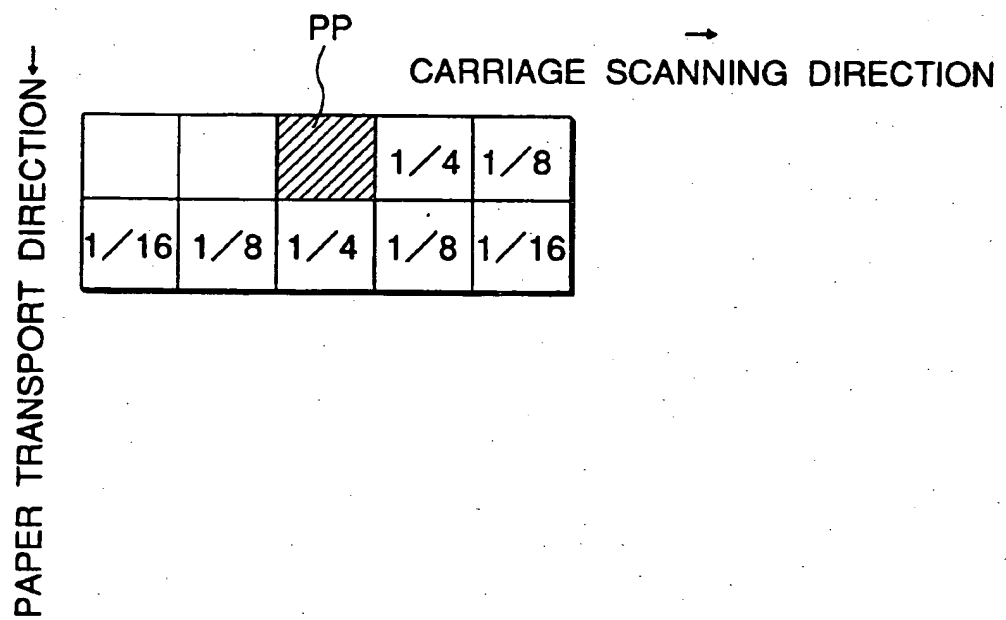| NO.	DOT		INK SURROUNDING DOTS		PATTERNS REJECTED BY SIGNAL PROCESSING	GRAININESS RESULTS	COLOR ORDERS ALLOWING PATTERNS TO EXIST	
1	C1	2ND	M1	1ST	///	×(BAD, NOT NEGLECTIBLE)	M1C1M2C2	M1M2C1C2
2	C1	2ND	M2	1ST	///		M1M2C1C2	
3	M1	2ND	C2	1ST	///		C1C2M1M2	
4	M1	2ND	C1	1ST	///		C1M1C2M2	C1C2M1M2
5	C2	2ND	M1	1ST			C1M1C2M2 M1C1M2C2	M1M2C1C2
6	C1	1ST	M1	2ND	///		C1M1C2M2	C1C2M1M2
7	C1	1ST	M2	2ND	///		C1M1C2M2 M1C1M2C2	C1C2M1M2
8	C2	2ND	M2	1ST			M1C1M2C2	M1M2C1C2
9	M1	1ST	C2	2ND	///		C1M1C2M2 M1C1M2C2	M1M2C1C2
10	M2	2ND	C2	1ST	///		C1M1C2M2	C1C2M1M2
11	M1	1ST	C1	2ND	///		M1C1M2C2	M1M2C1C2
12	C2	1ST	M2	2ND			C1M1C2M2	C1C2M1M2
13	C2	1ST	M1	2ND			C1C2M1M2	
14	M2	2ND	C1	1ST			C1M1C2M2 M1C1M2C2	C1C2M1M2
15	M2	1ST	C2	2ND			M1C1M2C2	M1M2C1C2
16	M2	1ST	C1	2ND		○(GOOD, NEGLECTIBLE)	M1M2C1C2	

I · II · III · IV

C1: DEEP CYAN, C2: LIGHT CYAN, M1: DEEP MAGENTA, M2: LIGHT MAGENTA,
1ST: PRIOR PRINTING, AND 2ND: SUBSEQUENT PRINTING

FIG.31

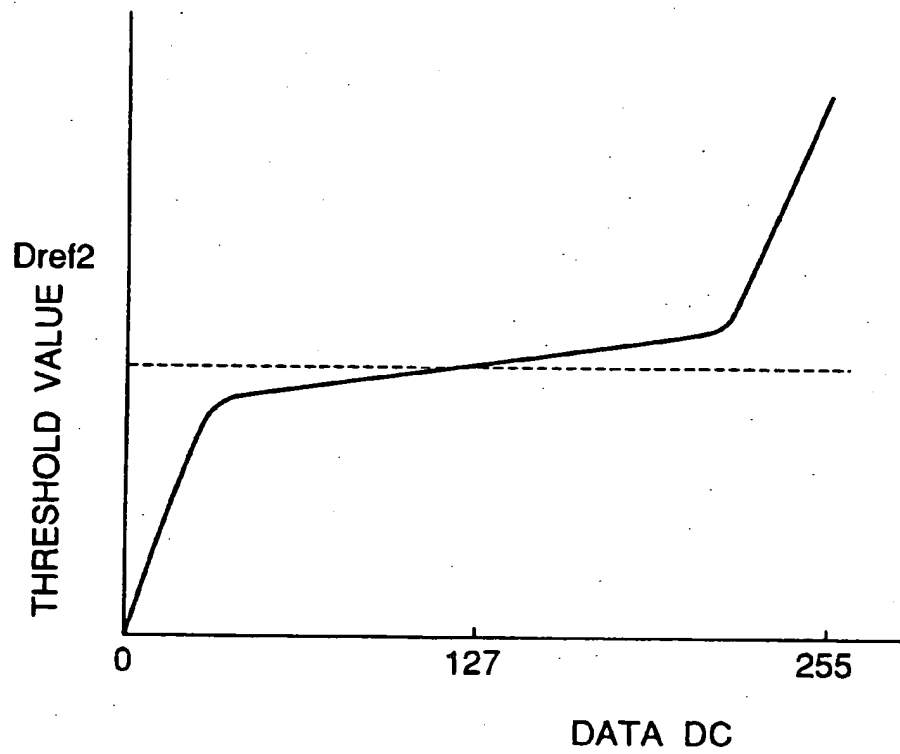| INK COLOR	DENSITY	AMOUNTS
MAGENTA	HIGH M1	8
	MIDDLE M2	12
	LOW M3	16
CYAN	HIGH C1	8
	MIDDLE C2	12
	LOW C3	16
YELLOW	HIGH Y1	10
	LOW Y2	14

FIG.32(A)

FIG.32(B)

FIG.32(C)
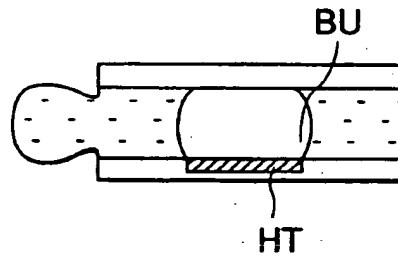
FIG.32(D)
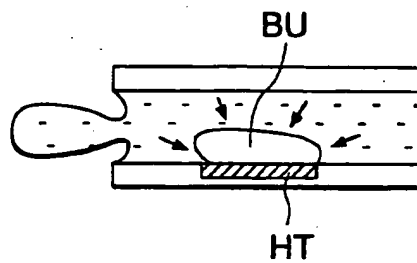
FIG.32(E)
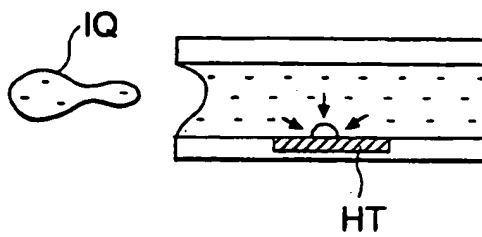
INK CARTRIDGE AND A PRINTING DEVICE USING THE INK CARTRIDGE

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to an ink cartridge containing a plural number of inks, and a printing device using the ink cartridge.

A color printer of the type in which inks of different colors are ejected from a head has prevailed for an output device of a computer. In printing a multi-color image by using three color inks of cyan, magenta and yellow (C, M, Y), some methods are available for the formation of a multi-tone image. One method is employed for the conventional printers. In this method, the size of a dot formed on a sheet of paper by an ink droplet or droplet ejected at once is fixed, and a tone of an image to be printed is expressed in terms of a density of dots (frequency of occurrence of dots per unit area). In another method, a density of an image per unit area is varied by adjusting the diameters of dots printed on the paper. Recently, a fine fabrication technique to fabricate a head for ejecting ink droplets advances, and a density of dots that can be formed within a given length and a range within which the dot diameter may be varied are increased and broadened year by year. However, in the field of printers, a print density (resolution) is at most 300 dpi to 720 dpi, and the diameter of ink droplets is in the order of several tens microns. These figures show that an expression ability of the printer is much inferior to that of a silver-salt photograph (its resolution is several tens dpi on the film).

In a region where an image density is low or a density of dots to be printed is low, dots are sparsely formed (called grained), and this is unpleasant to the eye. To cope with this, a printing device using light and deep

- 1 -

color inks and a printing method using the same were proposed. In the proposal, inks of high and low color densities are used for each color, and the ejection of those inks are controlled, whereby a print excellent in tone expression is realized. A recording method for recording a multi-tone image and a device for executing the method are disclosed in Japanese Patent Laid-Open Publication No. Sho. 61-108254. In the publication, a head for forming light and deep color dots for each color is provided. The number of light and deep dots formed within a given dot matrix and an overlapping of those dots are controlled in accordance with density information of an input image, whereby a multi-tone image is recorded.

A plural number of inks must be used for realizing the multi-color printing or multi-tone image printing. Those inks may be supplied from a plural number of ink tanks, respectively. In this case, the amounts of inks left in the tanks must be managed individually, and the piping from the ink tanks to the print head is complicated. To avoid those, the plural number of inks are stored in a single ink cartridge.

In the printing device using the plural number of inks, unsatisfactory study has been made on the proper amounts of the inks contained in the ink cartridge. Recently, to an easy handling, a plural number of inks are stored in a single ink cartridge, and those inks are all replaced with new ones. In this method, when any of the inks is used up, the whole cartridge is replaced with a new one. Thus, unless the amounts of light and deep color inks for each color contained in the ink cartridge are properly determined, the inks other than the ink completely used up must be discarded, and this is wasteful. Accordingly, an object of the present invention is to obtain a proper

- 2 -

relationship among the amounts of inks contained in the ink chambers of an ink cartridge.

Where the different amounts of inks are stored in the ink chambers of the ink cartridge, the ink chambers are also different in size, usually, and various problems arise. If the volumes of the ink chambers differ every ink, great difficulties arise in the design of the print head, usually, disposed right under the ink chambers, as well as its printing control. The difficulties will be described in detail. In a printer in which a print head is integrally mounted on a carriage on which an ink cartridge is put, an image is printed while moving the carriage in the widthwise direction of the paper (referred to a main scan direction). It is supposed that at least three ink chambers are arrayed on the ink cartridge in the main scan direction, and printing nozzles are located right under the ink chambers. If the widths (in the main scan direction) of the ink chambers are different with the different volumes of the ink chambers, the nozzle intervals are also different. If a plural number of ink droplets are applied to a position on the paper to form a dot thereat while moving the carriage, it is necessary to individually control the timings of forming the ink droplets for each ink.

In a case where a plural number of inks are stored in a single ink cartridge, when the cartridge is set to the carriage, a plural number of ink supply needles are concurrently inserted into the ink cartridge. This makes it difficult to secure a sufficient sealing at the time of inserting the needles. A plural number of ink supply ports must be provided within a limited space in association with the plural number of ink chambers. Therefore, it is difficult to secure a sufficient deflection of the sealing means, which is mounted on the ink supply ports, in the diameter direction. Accordingly, a slight position shift

- 3 -

that may occur at the time of mounting the ink cartridge will deteriorate the sealing performance or damage the ink supply needles. In a case where the different volumes of the ink chambers entails the unequal intervals among the ink supply ports, the sealing problem is more distinguished when comparing with the case where the ink supply ports are equidistantly arrayed. When the intervals among the ink supply ports are different, and as a result, the intervals among the ink supply needles or the intervals among the ink supply ports are varied, strain is frequently concentrated at specific locations.

Accordingly, another object of the present invention is to secure sufficient sealing at the ink supply ports of the ink cartridge including a plural number of ink chambers.

An ink cartridge is invented to achieve at least part of the objects. A printing device using the ink cartridge is invented. The ink cartridge and the printing device of the invention will be described hereunder.

A first ink cartridge of the invention is an ink cartridge containing inks for printer wherein at least three ink chambers for containing inks are formed by partitioning the inner space of the ink cartridge, the volume of one ink chamber being different from the volumes of the remaining ones, and ink supply ports communicatively connected to the ink chambers by way of ink passages are arrayed on the bottom of a main body of the ink cartridge in association with the ink chambers, respectively.

The ink cartridge is provided with at least three ink chambers for containing different inks, and the volume of one ink chamber is different from the volumes of the remaining ones. Ink supply ports communicatively connected to the ink chambers by way of ink passages are arrayed on the bottom of a main body of the ink cartridge in association with the ink chambers, respectively. The ink cartridge has an advantage of

an easy ink supply although its structure includes the ink chambers of the different volumes containing a plural number of inks.

The unique feature of the ink supply ports being equidistantly arrayed in a given direction, is very useful in the print head control. Specifically, if the ink supply ports are equidistantly arrayed, the ink ejecting positions are also equidistantly spaced from one another, usually. Accordingly, the control of the timings of ink ejection is also easy.

In the ink cartridge, the ink chambers of three or more are arranged in the direction of transporting the ink cartridge, the difference of the volume of the one ink chamber from those of the remaining ones is realized by the width difference of the one ink chamber, and the given direction in which the ink supply ports are arrayed is the ink cartridge transporting direction. By realizing the difference of the volume of the one ink chamber by the width difference of the one ink chamber, a space required for placing the transported ink cartridge within the printing device can be considerably reduced.

The ink chamber of the different volume, or the volume different from those of the remaining ones, is preferably located at the end of the ink cartridge. By so doing, the ink passages derived from the ink chambers are reduced in length as a whole. The ink chamber of the different volume may contain yellow ink. The yellow ink provides the least graininess when the dots are formed by it. Further, its color density may be set at a desired value, and the volume of the chamber-contained yellow ink may be varied relatively freely.

The ink chambers are five in number and contain magenta ink, light magenta ink whose color density is lower than magenta, cyan ink, light cyan ink whose color density is

lower than cyan, and yellow ink, and the ink chamber
containing yellow ink may be s located at the trailing end of
the series of the ink chambers when viewed in the cartridge
transporting direction. Normally, the positions of the ink
chambers in the ink cartridge are related to the printing
positions of the print head in one-to-one correspondence.
Therefore, the ink located at the trailing end is last
ejected to form a dot when the ink cartridge is moved. There
is a chance that the ink to form dot later spreads into the
ink to form a dot early. However, the yellow ink increases a
graininess if it spreads and the diameter of a dot formed
thereby increases.

The ink chambers are arranged in the order of the
cyan ink chamber, light cyan ink chamber, magenta ink
chamber, light magenta ink chamber, and yellow ink chamber
when viewed in the cartridge transporting direction. By so
arranging, if the ink later ejected spreads and a dot formed
by it increases its diameter, there is no increase of a
graininess of the resultant image.

In the ink cartridge, the ink supply ports includes
each a cylindrical fitting part fit to the inner surface of
the ink supply port, a thin, cylindrical flexible part
extended from the fitting part toward the ink chamber
associated therewith while being substantially parallel to
the fitting part, and an elastic sealing part being extended
upward from the flexible part while being protruded inward,
the elastic sealing part liquid tightly receiving an ink
supply needle to be inserted into the ink supply port
associated therewith. With such a structure, even when a
plural number of the ink supply ports are disposed within a
limited space, the thin, flexible part extended from the
fitting part toward the ink chamber associated therewith
while being substantially parallel to the fitting part,
operates to thereby ensure a reliable sealing.

A tapered guide surface for guiding the ink supply
needle is provided ranging from the bottom of the fitting
part to the flexible part. The unique feature enables the
ink cartridge to smoothly be loaded into the carriage. The
elastic sealing part is preferably formed protruding from the
inner surface of the flexible part through the tapered guide
surface for guiding the ink supply needle. When both are
formed into a unit, a limited space may be efficiently used.

In the ink cartridge, the ink chambers of three or
more are partitioned by partitioning walls, a lid is provided
covering the openings of the ink chambers, the chambers
having the openings formed in the sides thereof closer to the
ink supply ports, a plural number of reinforcing horizontal
ribs are raised from the inner surface of the lid while being
extended in the longitudinal direction of the ink chambers
and located corresponding to the ink chambers, a part of each
of the ribs closer to each of the ink supply ports being
higher than the remaining part thereof. With such a
structure, a strength of the ink cartridge is improved.
Therefore, the ink cartridge can be transported without any
deformation and any leakage of ink from the fitting parts of
the ink supply ports.

The kinds of inks contained in the ink chambers of
three or more of the ink cartridge and the amounts of the
chamber-contained inks are correlatively defined as follows:
the ink chambers of three or more contain the whole or
independently at least some of m (m : natural number of 2 or
larger) kinds of light and deep color inks $X1$, $X2$, ..., Xm
for each hue, and n (n : natural number of 1 or larger) kinds
of color inks $Y1$, ..., Yn whose lightness values are larger
than that of each of the color inks $X1$, $X2$, ..., Xm for the
same recording rate, and the amounts vxk ($1 \leq k \leq m$) of the m
kinds of chamber-contained color inks and the amounts vyi (1

$\le$ i $\le$ n) of the <u>n</u> kinds of color inks having large lightness
values satisfy the following relation

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk$$

and the amount of the deepest color ink, chamber-contained,
of the <u>n</u> kinds of color inks having the large lightness
values is larger than the amount of the deepest color ink,
chamber-contained, of the <u>m</u> kinds of color inks.

In the ink cartridge, the total sum of the amounts of
the inks having a high lightness for the same recording rate
is smaller than that of the inks of another hue. When the
amount of chamber-contained ink having the highest color
density in one hue is compared with the corresponding one in
the other hue, the amount of chamber-contained ink of the
highest color density of the <u>n</u> kinds of the inks of large
lightness values is larger than the amount of chamber-
contained ink of the highest color density of the <u>m</u> kinds of
light and deep color inks. If the amounts of both the inks
are so selected, proper amounts of the chamber-contained inks
in the ink cartridge are set up for the amounts of the inks
consumed in the ink cartridge of the printing device that
prints a multi-tone image. Thus, the amounts of inks stored
in the ink chambers are selected as described above, the
waste of all the inks in the ink cartridge are reduced for a
variation of the amounts of the consumed inks.

The color ink whose lightness value is larger than of
the remaining color inks may be yellow ink. A color printing
by using inks of three colors, cyan, magenta and yellow may
be imagined for such a case. Of those three color inks, the
yellow ink is the highest in lightness value. The kinds of
the color inks having large values may be reduced in number
when comparing to the remaining ones. It is practical that
the amount of consumed yellow ink is increased by the reduced

number of ink kinds with respect to the amount of deep color ink of the two or more kinds of light and deep color inks. This results in that in the printing device using the inks of the primary colors, cyan, magenta and yellow, the ink cartridge stores the cyan and magenta inks each consisting of at least two kinds of color inks for m kinds of light and deep color inks, and the color ink consisting of only yellow color in for n kinds of color inks.

The amounts of the m kinds of light and deep color inks contained in the ink chambers thereof and the amounts of the n kinds of color inks contained in the ink chambers thereof may be determined in consideration with γ-characteristics of the color inks.

In the ink cartridge of the invention, the ink chambers of three or more contain the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks $X1, X2, ..., Xm$ (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks $Y1, ..., Yn$ (the inks become thin in color density in this order) whose lightness values are larger than that of each of the color inks $X1, X2, ..., Xm$ for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of the m kinds of color inks contained in the ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of the n kinds of color inks having large lightness values contained in the ink chambers thereof satisfy the following relation

$vxi < vyi$ (i : integer between 1 and n).

In the ink cartridge, the amounts of the m kinds of color inks contained in the ink chambers thereof and the amounts of the n kinds of color inks having large lightness values contained in the ink chambers are correlatively defined as just mentioned. To be more specific, let us consider a case where the consumed inks are the inks of the

primary colors, cyan, magenta and yellow, and where for each
of the cyan and magenta, two kinds of color inks, or light
and deep color inks are used, and for the yellow, one kind of
color ink is used. In this case, the amount of chamber-
contained yellow ink is larger than that of the cyan or
magenta ink, as taught by the relation of the amounts of ink-
chambered or tank contained inks as stated above. By so
selecting the amounts of the ink-chamber contained inks,
there is no chance that the amounts of the i-th inks,
consumed, of the m kinds of light and deep color inks are
each greatly different from the amount of the i-th ink,
consumed, of the n kinds of the inks of high lightness.
Therefore, proper amounts of the inks are contained in the
ink cartridge used by a printing device for printing a multi-
tone image. Consequently, the amounts of color inks of
different colors and color densities contained in the ink
chambers are saved as a whole.

If $vyi \leq 1.5 \cdot vxi$ (i : integer between 1 and n), it
never happens that the amount of the i-th ink, consumed, of
the n kinds of the inks of high lightness is greatly
different from the amounts of the i-th inks, consumed, of the
m kinds of light and deep color inks.

Further, in the ink cartridge, the relation may be
defined by $vyi \leq 1.5 \cdot vxi$. In this case, the following
relation holds

$vxi < vyi \leq 1.5 \cdot vxi$.

The useless consumption of the inks is reduced as a whole.

Also in this case, in the printing by the primary
colors, cyan, magenta and yellow inks may be used. Actually,
the ink cartridge stores the cyan and magenta inks each
consisting of at least two kinds of color inks for m kinds of
light and deep color inks, and the color ink consisting of
only yellow color in for n kinds of color inks. The amounts
of the m kinds of light and deep color inks contained in the

ink chambers thereof and the amounts of the $\underline{n}$ kinds of color inks contained in the ink chambers thereof may be determined in consideration with γ-characteristics of the color inks.

The ink cartridge may be defined such that the ink chambers of three or more contain the whole or independently at least some of $\underline{m}$ (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and $\underline{n}$ (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of the color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of the $\underline{m}$ kinds of color inks contained in the ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of the $\underline{n}$ kinds of color inks having large lightness values contained in the ink chambers thereof satisfy the following relations,

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \qquad (n<m)$$

and

vxi < vyi < vxi + vxi+1 (i : integer between 1 and (n-1)).

In the ink cartridge, the total sum of the amounts of the inks having a high lightness for the same recording rate is smaller than that of the inks of another hue. When comparing the amounts of color inks of color densities with one another, the amount of chamber-contained ink having a color density of the $\underline{n}$ kinds of color inks having a high lightness is larger than the amounts of the chamber-contained inks having the higher color density of the $\underline{m}$ kinds of color inks, but is smaller than the total sum of the inks having the lower color density to the amount of ink. To be more specific, let us consider a case where the consumed inks are the inks of the primary colors, cyan, magenta and yellow, and where for each of the cyan and magenta, three kinds of color

inks, or light, medium and deep color inks are used, and for
the yellow, two kinds of color inks, or light and deep yellow
inks, are used. In this case, the total amount of two
chamber-contained yellow inks is smaller than that the total
amount of three cyan or magenta inks, and the amount of the
yellow of high color density is larger than of the magenta or
cyan ink of the highest color density, but smaller than the
sum of the amount of magenta or cyan ink of the highest color
density and the amount of magenta or cyan ink whose color
density is next to the former. Further, the amount of yellow
ink of low color density is larger than of the cyan or
magenta ink of a medium color density, but smaller than the
sum of the amount of cyan or magenta ink of the medium color
density and the amount of cyan or magenta ink whose color
density is next to the former. By so selecting the amounts
of both the inks contained in the ink chambers thereof, a
great difference is not created between the amounts of the
inks stored in the ink cartridge, and proper amounts of the
inks are contained in the ink cartridge used by a printing
device for printing a multi-tone image. In this case, the
unnecessary waste of the inks is further reduced.

In the ink cartridge, the ink chambers are six in
number and contain black ink, deep cyan ink, light cyan ink,
deep magenta ink, light magenta ink, and yellow ink, and the
six ink supply ports provided in association with the six ink
chambers are linearly arrayed in the direction of
transporting the ink cartridge, the ink supply ports being
arrayed in the order of black, deep cyan, light cyan, deep
magenta, light magenta, and yellow. This order is determined
in consideration with the spreading of inks. The light and
deep cyan inks whose graininess is easy to grow are ejected
earlier than the remaining one to form dots. As a result, it
never happens that the cyan dots are formed in an area formed

by another color he ink already ejected (the area is still wet), and the dot area grows to increase a graininess.

In addition to the ink cartridge described above, a printing device using the ink cartridge was invented on the basis of the same technical concept as of the ink cartridge. In this respect, it is believed that the combination of the printing device and the ink cartridge satisfies the requirement of the singleness of the invention.

The printing device has a head for ejecting at least two kinds of light and deep color inks and a color ink whose lightness value is larger than of the light and deep color inks for the same recording rate, the printing device printing an image in the form of a distribution of dots by the color inks. The printing device comprises:

an ink cartridge including ink chambers for containing inks are respectively formed for the color inks by partitioning the inner space of the ink cartridge, the volume of the ink chamber containing the color ink whose lightness value being larger than of the light and deep color inks for the same recording rate;

input means for inputting a tone signal of an image to be formed;

dot-formation determining means for determining the formation of dots by the $\underline{m}$ kinds of light and deep color inks for each hue and the ink having the larger lightness value in accordance with input tone signal; and

head drive means for causing the color inks contained in the ink chambers of the ink cartridge to eject from the head by controlling the head in accordance with the result of the dot formation determined by the dot-formation determining means.

The printing device is provided with an ink cartridge having ink chambers containing two or more kinds of color inks of different color densities and color ink whose

lightness is higher than of the two or more kinds of color inks for a recording rate. The volume of the ink chamber containing the ink whose lightness is higher than of the two or more kinds of color inks for a recording rate is larger than that of each of the ink chambers containing the remaining inks. If the total amount of consumed ink of higher lightness is smaller than the total amount of two or more kinds of the consumed inks of different color densities, proper amounts of the inks may be left in the ink chambers of the ink cartridge.

In the printing device, the ink cartridge contains the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn whose lightness values are larger than of the color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of the m kinds of color inks contained in the ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of the n kinds of color inks having large lightness values contained in the chambers thereof satisfy the following relation,

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \qquad (n<m)$$

and the amount of the deepest color ink, chamber-contained, of the n kinds of color inks having the large lightness values is larger than the amount of the deepest color ink, chamber-contained, of the m kinds of color inks.

In the printing device, the total sum of the amounts of the inks having a high lightness for the same recording rate is smaller than that of the inks of another hue. When the amount of chamber-contained ink having the highest color density in one hue is compared with the corresponding one in the other hue, the amount of chamber-contained ink of the

highest color density of the n kinds of the inks of large
lightness values is larger than the amount of chamber-
contained ink of the highest color density of the m kinds of
light and deep color inks. If the amounts of both the inks
are so selected, proper amounts of the chamber-contained inks
in the ink cartridge are set up with respect to the amounts
of the inks consumed by the printing device that prints a
multi-tone image.

In the printing device, the ink cartridge contains
the whole or independently at least some of m (m : natural
number of 2 or larger) kinds of light and deep color inks X1,
X2, ..., Xm (the inks become thin in color density in this
order) for each hue, and n (n : natural number of 1 or
larger) kinds of color inks Y1, ..., Yn (the inks become thin
in color density in this order) whose lightness values are
larger than of the color inks X1, X2, ..., Xm for the same
recording rate, and the amounts vxk ($1 \leq k \leq m$) of the m
kinds of color inks contained in the ink chambers thereof and
the amounts vyi ($1 \leq i \leq n$) of the n kinds of color inks
having large lightness values satisfy the following relation
$vxi < vyi$ (i : integer between 1 and n).

In the printing device, the amounts of the m kinds of
color inks contained in the ink chambers thereof and the
amounts of the n kinds of color inks having large lightness
values contained in the ink chambers are correlatively
defined as just mentioned. To be more specific, let us
consider a case where the consumed inks are the inks of the
primary colors, cyan, magenta and yellow, and where for each
of the cyan and magenta, two kinds of color inks, or light
and deep color inks are used, and for the yellow, one kind of
color ink is used. In this case, the amount of chamber-
contained yellow ink is larger than that of the cyan or
magenta ink, as taught by the relation of the amounts of ink-
chambered or tank contained inks as stated above. By so

selecting the amounts of the ink-chamber contained inks, there is no chance that the amounts of the i-th inks, consumed, of the m kinds of light and deep color inks are each greatly different from the amount of the i-th ink, consumed, of the n kinds of the inks of high lightness. Therefore, proper amounts of the inks are contained in the ink cartridge with respect to the amounts of inks used by a printing device for printing a multi-tone image.

If $vyi \leq 1.5 \cdot vxi$ (i : integer between 1 and n), it never happens that the amount of the i-th ink, consumed, of the n kinds of the inks of high lightness is greatly different from the amounts of the i-th inks, consumed, of the m kinds of light and deep color inks.

In the printing device, the ink cartridge contains the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of the color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of the m kinds of color inks contained in the ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of the n kinds of color inks having large lightness values contained in the chambers thereof satisfy the following relations

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \qquad (n<m)$$

and

vxi < vyi < vxi + vxi+1 (i : integer between 1 and (n-1)).

In the printing device, the total sum of the amounts of the inks having a high lightness for the same recording rate is smaller than that of the inks of another hue. When

- 16 -

comparing the amounts of color inks of color densities with one another, the amount of chamber-contained ink having a color density of the n kinds of color inks having a high lightness is larger than the amounts of the chamber-contained inks having the higher color density of the m kinds of color inks, but is smaller than the total sum of the inks having the lower color density to the amount of ink. To be more specific, let us consider a case where consumed inks are the inks of the primary colors, cyan, magenta and yellow, and where for each of the cyan and magenta, three kinds of color inks, or light, medium and deep color inks are used, and for the yellow, two kinds of color inks, or light and deep yellow inks, are used. In this case, the total amount of two chamber-contained yellow inks is smaller than that the total amount of three cyan or magenta inks, and the amount of yellow of high color density is larger than of the magenta or cyan ink of the highest color density, but smaller than the sum of the amount of magenta or cyan ink of the highest color density and the amount of magenta or cyan ink whose color density is next to the former. Further, the amount of yellow ink of low color density is larger than of the cyan or magenta ink of a medium color density, but smaller than the sum of the amount of cyan or magenta ink of the medium color density and the amount of cyan or magenta ink whose color density is next to the former. By so selecting the amounts of both the inks contained in the ink chambers thereof, a great difference is not created between the amounts of the inks stored in the ink cartridge, and proper amounts of the inks are contained in the ink cartridge used by a printing device for printing a multi-tone image.

In the printing device, the printing device is an ink jet printing device, the head is a print head having at least six series of nozzle orifices for independently ejecting ink droplets of black, deep cyan, light cyan, deep magenta, light

magenta, and yellow, and control means for causing the print head to eject, in accordance with image signals, ink droplets to form dots each forming one pixel by black ink, deep cyan ink, light cyan ink, deep magenta ink, light magenta ink, and yellow ink in this order.

The amounts of the m kinds of light and deep color inks contained in the ink chambers thereof, and the amounts of the n kinds of color inks contained in the ink chambers thereof are preferably determined in consideration with γ-characteristics of the color inks. A dye concentration (or a lightness of the print) of the ink of each color density is different every printing device. The amounts of the color inks for producing a print of a proper color density are different for each printing device. The γ-correction is used for compensating for those differences. By the γ-correction, the amounts of the color inks are properly set up.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram schematically showing a printer 20 according to an embodiment of the present invention;

Fig. 2 is a block diagram showing a construction of a control circuit 40 contained in the printer 20;

Fig. 3 is a perspective view showing a construction of a carriage 30;

Fig. 4 is an explanatory diagram showing a layout of color ink heads 61 to 66 of a print head 28;

Fig. 5 is a perspective view showing an external appearance of the ink cartridge 70 for containing color inks;

Fig. 6 is an exploded view perspectively showing the structure of a color ink cartridge 70b;

Fig. 7 is a cross sectional view showing an internal structure of the color ink cartridge 70b;

Fig. 8 is a cross sectional view showing the color ink cartridge 70b when it is cut at another position;

- 18 -

Fig. 9 is an enlarged view showing a portion in the vicinity of an ink supply port 110;

Fig. 10 is a bottom view of the color ink cartridge 70b;

Fig. 11 is a view showing a lid 120 when viewed in three directions;

Fig. 12 is a view showing the end face of the color ink cartridge 70b, in which snake grooves 133 are well illustrated;

Fig. 13 is an explanatory diagram showing a construction for causing the color ink heads 61 to 66 to eject ink droplets;

Fig. 14 is an explanatory diagram suitable for explaining how an ink droplet Ip is ejected by an expansion of the piezoelectric element PE;

Fig. 15 is a block diagram showing a process ranging from image information handled by a computer 90 to the printing based on the image information;

Fig. 16 is a table showing the gradients of color inks and the amounts of the color inks contained in the ink chambers;

Fig. 17 is a graph showing relationships between the recording rates of the individual color inks and the lightness;

Fig. 18 is a flow chart showing a process carried out by a half-tone module 99;

Fig. 19 is a flow chart showing a deep color dot forming judging process routine;

Fig. 20 is a graph showing relationships between the recording rates by light and deep color inks in the present embodiment;

Fig. 21 is a graph exemplarily showing a γ-correction data in the printer 20;

Fig. 22 is a graph showing the relationships between the recording rates after γ-correction and tone data;

Fig. 23 is a diagram showing a process to determine deep color dots by an ordered dither method;

Fig. 24 is a diagram showing how an error is allotted from a dot to its peripheral dots in the error diffusion method;

Fig. 25 is a flow chart showing a light color dot forming determining process routine;

Fig. 6 is a graph showing how a threshold value Dref2 is set to corrected data DC;

Fig. 27 is an explanatory diagram showing a process of forming dots by light and deep color inks;

Fig. 28 is a spectral diagram of the color inks;

Fig. 29 is a diagram showing print patterns by magenta ink whose graininess becomes problematic and cyan ink;

Fig. 30 is a table showing the relationships between the printing orders of the color inks and graininess;

Fig. 31 is a table showing additional combinations of the amounts of the chamber-contained, light and deep color inks; and

Fig. 32 is an explanatory diagram showing another structure of an ink jetting mechanism.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will be described. In the specification, the invention is embodied in the two forms; one is an ink cartridge and the other is a printer. An overall arrangement of a printer 20 will first be described for ease of explanation. As shown in Fig. 1, the printer 20 is constructed with a mechanism for feeding a thin print substrate, such as a sheet of paper P, under drive of a paper feed motor 22, a mechanism for

reciprocatively moving a carriage 30 under drive of a carriage motor 24, a mechanism for controlling the ejection of ink droplets and the formation of dots by the ink droplets by driving a print head 28 mounted on the carriage 30, and a control circuit 40 for transferring control and its related signals to and from the paper feed motor 22, carriage motor 24, print head 28, and an operation panel 32.

The mechanism for feeding the paper P includes a gear train (not shown) for transmitting a rotation of the paper feed motor 22 to a paper feeding roller (not shown) as well as a platen 26. The mechanism for reciprocatively moving the carriage 30 includes a slide shaft 34, provided in parallel to the shaft of the platen 26, for slidably holding the carriage 30, a pulley 38 coupled with the carriage motor 24 by an endless drive belt 36 stretched therebetween, a position sensor 39 for sensing an original position of the carriage 30, and the like.

An arrangement of the printer constructed laying stress on the control circuit 40 is shown in Fig. 2. As shown, the control circuit 40 is constructed as an arithmetic logic circuit including mainly a known CPU 41, a P-ROM 43 for storing programs and the like, a RAM 44, a character generator (CG) 45 for storing a character dot matrix. In addition, the control circuit 40 includes an I/F circuit exclusively used for an interface with external motors and the like, a head drive circuit 52 for driving the print head 28 connected to the I/F circuit 50, and a motor drive circuit 54 for driving the paper feed motor 22 and the carriage motor 24. The I/F circuit 50, containing a parallel interface circuit, is connected to a computer via a connector 56, and may receive print signals from the computer. The image signals output from the computer will be described later.

Description to follow is elaboration of a specific construction of the carriage 30, the structures of ink

cartridges 70a and 70b mounted on the carriage 30, and the principle of ejecting ink droplets out of the print head 28 when it receives ink from the ink cartridges 70a nd 70b. Fig. 3 is a perspective view showing a construction of the carriage 30. Fig. 4 is a plan view showing color ink discharging nozzle arrays on the print head 28 disposed under the carriage 30. As shown in Fig. 3, the carriage 30, shaped like L, is designed so that a black ink cartridge 70a, not shown, and a color ink cartridge 70b (see Fig. 5) may be mounted thereon. The carriage 30 is provided with a partitioning wall 31. When mounted on the carriage, the cartridges are parted from each other by the partitioning wall 31 while being detachable from carriage. The print head 28, located under the carriage 30, is provided with a total of six ink introducing heads 61 to 66. Ink introducing pipes 71 to 76 for introducing ink from the ink tanks to the color ink heads 61 to 66 stand upright on the bottom of the carriage 30. When the black ink cartridge 70a and the color ink cartridge 70b are set to the carriage 30 from above, the ink introducing heads 61 to 66 of the print head 28 are inserted into the ink supply ports of the cartridges, respectively.

The inner structure of the color ink cartridge 70b will be described. Fig. 6 is an exploded view perspectively showing the structure of the color ink cartridge 70b. Two types of color inks of light and deep colors for magenta and cyan, and a total of five kinds of inks are contained in the color ink cartridge 70b. The color ink cartridge 70b, made of polypropylene, takes the form of a cuboid having a little extrusions from the surface thereof as a whole so as to have the largest possible volume. The color ink cartridge 70b includes ink chambers 102 to 102e for containing two types of color inks of light and deep colors of magenta and cyan, and an ink chamber 102a, wider than each of the above ones, for

containing yellow ink. Those ink chambers are partitioned by partitioning walls 103. The yellow ink chamber 102a is located at the outmost end of a series of those chambers contained in the color ink cartridge 70b, and its volume is larger than of the remaining ones.

The outer wall 104 of the color ink cartridge 70b is thicker than the partitioning wall 103. The peripheral edge 105 of an opening of the top of the outer wall 104 is somewhat extended outward to be thicker than the remaining portion of the outer wall 104. Provision of the thick opening edge 105 provides a sufficient rigidity of the color ink cartridge 70b. Ribs 106 are integrally formed along the corners of the outer wall 104 of the ink cartridge. The ribs of the cartridge position the cartridge per se when the cartridge is mounted on the carriage 30, and hold the shape of their cartridge.

Cylindrical ink supply ports 110a to 110e, coupled with one another, are provided while being protruded from the bottom surfaces of the ink chambers 102a to 102e. Configurations of the ink supply ports 110a to 110e are well illustrated in Figs. 7 and 8 showing cross sections of the color ink cartridge 70b, Fig. 9 showing an enlarged view showing a part of the color ink cartridge, and Fig. 10 showing a bottom view of the same. The ink supply ports 110a to 110e are enclosed by a common frame 112, while being connected to the latter by means of ribs 111.

Both ends of the frame 112 are extended outside beyond the ink supply ports 110a and 110e of the series of those ports. The end faces of the frame 112 are sufficient in area, so that in storing the cartridge, all the ink supply ports 110a to 110e may be tightly sealed, at once, with a tape 115 with the tape being not extended from the outer wall 104. When the tape 115 is applied to there, air inside the space defined by the frame flows into air escape parts 114,

and then flows out of the inner space through cutouts 113 formed on the upper edge of the frame 112. Therefore, the tape 115 can reliably be stuck onto the end faces of the frame 112.

These ink supply ports 110a to 110e, as shown in Fig. 7, are protruded from the bottom 108 of the ink cartridge while being arrayed at fixed intervals. The ink supply port 110a corresponding to the wide, yellow ink chamber 102a is deviated in location to the inner side when viewed from the ink chamber 102a. With this, ink introducing pipes 72 to 76 of the print head 28, which are protruded in the carriage 30, may be equidistantly arrayed corresponding to the ink supply ports 110a to 110e, respectively.

Sealing means 116, made of rubber (silicone rubber), are fit into the ink supply ports 110a to 110e, respectively. With these sealing means, the ink introducing pipes 72 to 76 are hermetically inserted into the ink supply ports 110a to 110e, respectively. Each of the sealing means 116, which are fit to the ink supply ports 110a to 110e, as shown in Fig. 9, includes a cylindrical fitting part 116a, a slanted guide part 116b, a flexible part 116c, a ring-like fitting part 116d, and a slanted guide part 116e. When the sealing means 116 are fit to the ink supply ports, the outer surface of the fitting part 116a of each sealing means 116 frictionally comes in contact with the inner surface of the corresponding ink supply port 110. The guide part 116b is obliquely extended from the inner surface of the opening end of the fitting part 116a, and the flexible part 116c is extended inward from the guide part 116b. The flexible part 116c is a thin cylindrical extension substantially parallel to the cylindrical fitting part 116a, with a gap c being present between those parts. The guide part 116e is extended upward (when viewed in the drawing) from the inner end of the flexible part 116c, and the fitting part 116d is extended

upward from the guide part 116e while protruded inward. The
fitting part 116d tightly comes in contact with the incoming
ink supply needle of the print head. When the color ink
cartridge 70b is set to the print head mounted on the
carriage, the ink introducing pipes 72 to 76 are guided by
the guide parts 116b of the sealing means 116 and then the
guide part 116e thereof into the ink supply ports 110. At
the completion of the setting of the color ink cartridge 70b,
the ink introducing pipes 72 to 76 are smoothly put in close
contact with the fitting parts 116d of the sealing means.
Therefore, the sealing means 116 exercise their highly
sealing functions even where the ink supply ports 110a to
110e are closely arrayed in series.

An engaging groove 117 is formed along the array of
the ink supply ports 110a to 110e on the bottom 108 of the
color ink cartridge 70b. By fitting a support bar 101 of a
lifter provided on the carriage 30 into the engaging groove
117, the black ink cartridge 70a and the color ink cartridge
70b are correctly set to the print head. The engaging groove
117 includes a stepped part 118. Provision of the stepped
part 118 brings about the following useful effects. It is
impossible to completely discharge ink staying in a place in
the color ink cartridge 70b where is lower than an ink exit
port by the capillary action of a foam 119. The stepped part
118 excludes the presence of the foam 119 in this place
within the color ink cartridge 70b, to reduce an amount of
ink left in the cartridge. For packaging the color ink
cartridge 70b, the cartridge is put in an aluminum pack, and
reduced in pressure therein. In this case, a space for
pressure reduction is required. The stepped part 118
provides such a space.

The upper structure of the color ink cartridge 70b
will be described. A lid 120 for sealingly cover the opening
of the color ink cartridge 70b may be fit to the top of the

color ink cartridge 70b. A configuration of the lid 120 is
best illustrated in Fig. 11. As shown, pairs of longitudinal
ribs 121 for pressing the foam 119 contained in the ink
chambers 102a to 102e, while being protruded from the lid
120, are provided at fixed spatial intervals in association
with the ink chambers 102a to 102e, respectively. Those ribs
have each such a length as to allow the lid 120 to slightly
slide in the longitudinal direction. A portion of each rib,
closer to the ink supply ports 110, is higher than the
remaining portion thereof. A state of the ribs 120 when
these are mounted on the color ink cartridge 70b is well
illustrated in Fig. 8. When the lid 120 is applied to the
body of the color ink cartridge 70b, the ribs 121 more
strongly press the foam 119 in this portion than in the
remaining portion since the portion of the ribs closer to the
ink supply ports 110 is higher, whereby the voids of the
portion of the foam 119 closer to the ink supply ports, are
compressed. As a result, the capillary action is more
intensive in this foam portion than in the remaining foam
portion. Ink uniformly absorbed in the foam 119 is gathered
in the area in the vicinity of the ink supply ports 110 with
decrease of the amount of sucked ink.

Outside the ribs 121, the reinforcing horizontal ribs
122 are raised from the lid while being extended in the
direction orthogonal to the longitudinal direction. The
horizontal ribs 122 are in contact with the partitioning
walls 103 that partition the ink chambers 102a to 102e, as
well as the inner surface of the outer wall 104, whereby
preventing those from being bent inward. As shown in Fig.
11(b), reinforcing horizontal ribs 122a and 122e are provided
for the outermost ribs 121, respectively. The outer sides of
the horizontal ribs 122a and 122e define surfaces 123 welded
to welding margins 105a (Fig. 11(a)) protruded from the top
face of the outer wall 104. Each welding surface 123 reaches

outer protruded edges 125 of the lid, with a thin groove 124 for receiving welding dust droplets produced at the time of welding process being located between them.

As shown in Fig. 12, a series of ink filling holes 130 and a series of air discharging holes 132 are provided in the portions of the top of the lid 120, a central portion and a portion located closer to the ink supply ports 110, while corresponding to the ink chambers 102a to 102e. The ink filling holes 130, as shown in Figs. 11(a) and 11(b), take the form of cylindrical walls 131 the height of which is below the height of the ribs 121 within the inner wall of the lid 120, and partially interrupt passages 126 each present between the paired ribs 121.

As shown in Fig. 12, snake grooves 133 of which the start ends are communicatively connected to the air discharging holes 132 are formed on the upper surface of the lid 120 in a labyrinth fashion. The snake grooves 133 are provided for each of the ink chambers 102a to 102e. The terminal ends of the snake grooves 133 reach air passage parts 134a to 134e, gathered at a given location (farthest from the air discharging holes 132) on the upper surface of the lid 120. Before the color ink cartridge 70b is mounted on the carriage 30 of the printer 20, of a film 135 covering the upper surface of the color ink cartridge 70b, its portion covering the air passage parts 134a to 134e is peeled off. As a result, the ink chambers 102a to 102e are exposed to the air through the snake grooves 133. It is noted, however, that the long snake grooves 133 impede the evaporation of ink within the cartridge.

The air passage parts 134a to 134e of the terminal ends of the snake grooves 133, which are gathered at one specific location, are arrayed in a triangle oriented such that its vertex lies at the front when viewed in the direction of stripping the film. In this case, one (the air

passage part 134e in this embodiment) of the air passage parts 134a to 134e lies at the vertex of the triangle array. Therefore, it is easy to strip the film 135 from the upper surface of the lid.

The snake grooves 133 are different in their width and depth when viewed in their cross section. By so configured, when the film 135 is welded by a heater chip, there is no chance that the grooves are filled with the film in the overlapping portion of the film or are flattened when those grooves are pressed against the partitioning walls 103 and the outer wall 104.

A process of manufacturing the ink cartridge 70 thus constructed will be described. To begin with, a lid 120 is assembled into the ink cartridge 70. In the assembling work, the lid 120 is put on the ink cartridge 70 in a state that it covers the opening of the cartridge. Then, it is slid in the lengthwise direction. The welding margins 105a protruded outward at the end faces of the outer wall 104 and the welding surfaces 123 of the lid 120 are welded together by their sliding resistance. At this time, the partitioning walls 103 and the outer wall 104 are not deformed since those are protected by the reinforcing horizontal ribs 122 raised outside the ribs 121. The welding dust generated during the welding process are gathered into the thin groove 124 in the inner surface of the lid 120. In this way, the ink cartridge 70 and the lid 120 are coupled into a unit with a gap of approximately 0.2mm present therebetween.

Ink of small surface tension is injected into the ink cartridge 70 through the ink filling holes 130 of the lid 120. The cartridge is slanted at approximately 30° in a state that the air discharging holes 132 are located in the upper side. In this state, the film 135 is stuck on the upper surface of the lid 120 while decreasing the pressure in

the ink cartridge. The compositions of the ink to be injected into the cartridge will be described later.

The pressure reduction entails generation of bubbles in the foam 119 of the ink chambers 102a to 102e. The bubbles move bypassing the cylindrical walls 131 of the ink filling holes 130, which are projected partially interrupting the passages 126 each between the paired ribs 121. With evaporation of the bubbles, the bubbles are separated into air and ink. Only air flows to the upper surface of the lid 120 through the air discharging holes 132, and pass through the snake grooves 133 and flow into the air passage parts 134a to 134e being in contact with the film 135. Therefore, when the cartridge is used, a part of the film 135 is stripped off from the upper surface of the lid 120 to expose the air passage parts 134a to 134e, whereby the ink chambers 102a to 102e is opened to the air. When the ink chambers 102 are opened, ink is allowed to flow outside from the ink supply ports 110, and the ink cartridge is ready for its use.

In the embodiment, the color ink cartridge 70b is made of polypropylene, but any other material may be used if it is soft synthetic resin of moisture impermeability, for example, high density polyethylene. In the description, the structure of the black ink cartridge 70a is not referred to in particular. However, the basic structures of the black ink cartridge 70a, for example, the ink filling structure using the foam 119 and the structure of the sealing means 116 of the ink supply ports, are exactly the same as of the color ink cartridge 70b.

In the above-mentioned embodiment, it is noted that the spatial intervals between the ink supply ports provided on the bottom of the color ink cartridge 70b are equal. The intervals of the array of the ink introducing pipes 72 to 76 provided on the carriage 30 and the holding intervals of the sealing means 116 fit into the ink supply ports 110 can be

- 29 -

uniquely determined in harmony with the intervals of the array of the ink supply ports 110. Therefore, the assembling work is easy and the assembling accuracy is improved.

The sealing means 116 to be fit into the ink supply ports 110 can be reduced in diameter. The sealing means 116 to be fit into the ink supply ports 110 may be sufficiently deformed in diameter. Further, the sealing means 116 absorbs a positional incoincidence that is inevitably created between the ink cartridge 70 and the ink introducing pipes 72 to 76 when the ink cartridge 70 is mounted to the carriage, whereby the ink introducing pipes are prevented from being broken and may be smoothly be inserted into ink supply ports.

The pairs of the ribs 121, which is higher in the region of the ink supply ports 110, are provided on the inner surface of the lid 120. With the ribs, the foams 119 are compressed, the bubbles are reduced in diameter, and the capillary force is increased. Therefore, it is possible to use the largest possible amount of ink within the ink chambers 102 of the limited volumes. By making use of the ribs 121 provided for each of the ink chambers 102, the reinforcing horizontal ribs 122 for minimizing the deformation of the partitioning walls and the outer wall are provided on the outer sides of those ribs, whereby preventing in advance the deformation of the ink cartridge, which will be caused at the time of sliding resistance welding.

The printer 20 which is a printing device according to another embodiment of the present invention will be described. When the black ink cartridge 70a and the color ink cartridge 70b are set to the carriage 30, the ink introducing pipes 72 to 76 are inserted into the ink supply ports 110a to 110e of the color ink cartridge 70b, and the ink introducing pipe 71 is inserted into the black ink cartridge 70a (Fig. 3). By making use of the capillary action, ink is sucked out of the foam 119 of the ink cartridge 70 which stores the ink,

and introduced into the ink introducing heads 61 to 66 of the print head 28 by way of the ink introducing pipes 71 to 76. When the ink cartridges are first set to the carriage, ink is sucked into the color ink heads 61 to 66 by a pump, exclusively used for the ink sucking. Description on the constructions of the ink sucking pump, the cap used capping the print head 28 at the time of ink sucking, and the like are omitted because those are not essential to the present invention.

A total of 32 nozzles n are provided for each color ink heads 61 to 66, as shown in Figs. 4 and 13. A piezoelectric element PE is provided for each nozzle. The piezoelectric element PE is one of electrostrictive strain elements and excellent in response. A structure including the piezoelectric element PE and the nozzle n is illustrated in detail in Fig. 14. As shown, the piezoelectric element PE is located in close proximity to an ink passage 80 for introducing ink to the nozzle n. As well known, when the piezoelectric element PE is placed under a voltage applied thereto, its crystal structure is strained and the element converts electrical energy to mechanical energy at extremely high speed. In the embodiment under discussion, a voltage is applied to between electrodes of the piezoelectric element PE for a predetermined time period. Then, the piezoelectric element PE expands for the time period of voltage application to deform one side wall of the ink passage 80 (the lower part of Fig. 14). The ink passage 80 reduces its volume in accordance with the expansion of the piezoelectric element PE. An amount of ink corresponding to the reduced volume of the passage is ejected in the form of an ink droplet Ip from the tip of the nozzle n. The ink droplet Ip permeates a sheet of paper P set on the platen 26, to effect the printing.

The color ink heads 61 to 66 of the print head 28 are arrayed as shown in Fig. 4 in consideration of the provision of the piezoelectric elements PE. As shown, color ink heads are paired and three pairs of color ink heads are arranged side by side. The black ink head 61 is located at one end of the color ink head array while being close to the black ink cartridge. The cyan ink head 62 is located next to the black ink head 61. These color ink heads are paired in the ink head array. Another cyan ink head 63 and the magenta ink head 64 are paired, and located next to the pair of the ink heads 61 and 62. The cyan ink (called a light cyan ink) of the ink head 63 is lighter than that of the cyan ink head 62. Another magenta ink head 65 and the yellow ink head 66 are paired and located next to the pair of the ink heads 63 and 64. The magenta ink (light magenta) of the ink head 65 is lighter than a normal magenta ink. The composition and densities of those color inks will be described later.

As shown in Figs. 3, 4, 5 and 13, the ink chambers 102e to 102a of the color ink cartridge 70b, the ink introducing pipes 72 to 76, and the color ink heads 62 to 66 are arrayed exactly in one-to-one correspondence, respectively. To be more specific, in the color ink cartridge 70b, as shown in Fig. 5, the yellow ink chamber 102e whose volume is the largest of those ink chambers contains yellow ink, and connected to the yellow ink head 66 through the ink introducing pipe 76. The ink chamber 102b containing light magenta M2, located adjacent to the yell ink chamber 102a, is connected to the light magenta ink head 65 through the ink introducing pipe 75. The ink chamber 102c containing magenta M1 is connected to the magenta ink head 64 through the ink introducing pipe 74; the ink chamber 102d containing light cyan ink C2 is connected to the light cyan ink head 63 through the ink introducing pipe 73; and the ink chamber 102e containing cyan C1 is connected to the cyan ink

head 62 through the ink introducing pipe 72. A tube, not shown, is connected from the ink introducing pipe 71, which is coupled with the black ink cartridge 70a, to the print head 28, and to the black ink head 61. Those elements are arranged in one-to-one correspondence, and the connections range from of the ink chambers of the ink cartridges ranges to the color ink heads 61 to 66, respectively.

To form a multi-color image on the paper P, the printer 20 having the thus constructed hardware operates in the following way. The platen 26, the rollers and the like are turned by the paper feed motor 22, to thereby feed the paper P. The carriage 30 is reciprocatively moved by the carriage motor 24. The piezoelectric elements PE of the color ink heads 61 to 66 of the print head 28 are driven to eject drops of the color inks. In this case, the printer 20 receives signals from an image forming apparatus including a computer 90 by way of the connector 56, to form a multi-color image (Fig. 15). In this instance, an application program running within the computer 90 displays an image on the screen of a CRT display 93 by way of a video driver 91, while carrying out an image processing. When the application program 95 issues a print instruction, a printer driver 96 receives image information from the application program and converts it into a signal by which the printer 20 can perform the printing. In the instance of Fig. 15, the printer driver 96 includes therein a rasterizer 97, a color correction module 98, and a half-tone module 99. The rasterizer 97 converts the image information handled by the application program 95 into dot-basis color information. The color correction module 98 applies a color correction to the image information (tone data) as the dot-basis color information in accordance with a color development characteristic of the image outputting device (printer 20 in this embodiment). The half-tone module 99 generates so called half-tone image

information to express an optical density in an area in the form of presence and absence of ink for each dot on the basis of the image information after color corrected. The operations of those modules are well known and hence description of them is omitted, and the details of the half-tone module 99 will be described later.

As described above, in the printer 20 of the present embodiment, the print head 28 includes the print heads 63 and 65 of light cyan and light magenta inks, in addition to the ink heads of four colors of C, M, Y and K. The light cyan and magenta inks are formed by reducing dye concentrations of normal cyan and magenta inks, as seen from the ingredients of the inks shown in Fig. 16. As shown, the cyan ink of a normal concentration (denoted as C1 in Fig. 16) contains 3.6 wt% of direct blue 199 as dye, 30 wt% of diethylene glycol, 1 wt% of Surfynol 465, and 65.4 wt% of water. The light cyan ink (denoted as C2 in Fig. 16) contains 0.9 wt% (1/4 in the cyan ink C1) of direct blue 199 as dye, 35 wt% of diethylene glycol as viscosity adjustment, and 63.1 wt% of water. The magenta ink of a normal concentration (denoted as M1 in Fig. 16) contains 2.8 wt% of acid red 289 as dye, 20 wt% of diethylene glycol, 1 wt% of Surfynol 465, and 76.2 wt% of water. The light magenta ink (denoted as M2 in Fig. 16) contains 0.7 wt% (1/4 in the magenta M1) of acid red as dye, 25 wt% of diethylene glycol, and 73.3 wt% of water.

As shown in Fig. 16, the yellow ink Y and the black ink K are direct yellow 86 and food black 2 for dye, which are 1.8 wt% and 4.8 wt%. Viscosities of those inks are adjusted to approximately 3 [mPa·s]. In the present embodiment, the surface tensions of those inks as well as the viscosities are adjusted to be substantially equal. Therefore, the piezoelectric elements PE of the color heads can be equally controlled irrespective of the kinds of the inks to form dots.

The amounts of the color inks contained in the color ink cartridge 70b are as shown in Fig. 16. The amount vy of yellow ink is 28g in root-mean-square value, and the amounts $vm1$, $vm2$, $vc1$ and $cv2$ of the magenta ink, light magenta ink, cyan ink and light cyan ink are each 20g. Those amounts of inks are related as follows:

$$vy < vc1 + vc2, \text{ and } vy < vm1 + vm2.$$

Further,

$$vc1 < vy \text{ and } vm1 < vy.$$

Additionally,

$$vy \leq 1.5 \cdot vc1 \text{ and } vy \leq 1.5 \cdot vm1.$$

The lightness values of those color inks contained in the color ink cartridge 70b were measured and the results of the measurement are shown in Fig. 17. In the graph of Fig. 17, the abscissa represents a recording rate for a recording resolution of the printer. Here, the recording rate means a percentage of dots recorded on a white paper P by ink droplets IP ejected from the nozzle n. 100 of the recording rate means that the entire surface of the paper P is coated with ink droplets IP. In the present embodiment, a concentration of dye of the light cyan ink C2 is 1/4 in wt% in the cyan ink C1. The lightness value of the light cyan ink C2 when its recording rate is 100% is equal to that of the cyan ink C1 when its recording rate is approximately 35%. This relation is correspondingly applied to the magenta ink M1 and the light magenta ink M2. The recording rate at which the inks of different color densities are equal in their lightness is determined depending on a degree of beauty of a mixture of colors when the print is performed by using both the inks, and practically it is adjusted to be preferably within the range of 20% to 50%. This relation may be described in terms of a rate of the weight percent of the dyes in both the inks. That is, the relation is substantially equivalent to the adjustment of a weight

percent of dye in the inks of low color density (light cyan ink C2 and light magenta ink M2) to be about 1/5 to 1/3 as large as a weight percent of dye in the ink of high color density (cyan ink C1 and magenta ink M1).

How the printer 20 to print by using the light and deep color inks will be described in accordance of the procedural steps of a process in the half-tone module 99 of the printer driver 96. Fig. 18 is a flow chart showing an outline of a process of the half-tone module 99. As shown, when the print process starts, the pixels are successively scanned in the order from a pixel at the left upper corner to the subsequent ones in the rightward direction. The color correction module 98 inputs to the printer tone data DS of the pixels already color corrected (each tone data of 8 bits wide for each of the colors C, M, Y and K) in the scanning direction of the carriage (step S100).

The description will be given on the assumption that only the cyan ink is used for the printing, for ease of explanation. Actually, a multi-color print is performed, however. For the color of magenta, deep color dots and light color dots are formed by the high concentration magenta ink M1 and the low concentration light magenta ink M2. For the color of yellow, dots are formed by the yellow ink Y, and for the color of black, dots are formed by the black ink K. When the dots are formed by different color inks in a given area, a control necessary for obtaining a good reproduction of a mixed color, for example, a control so as to prohibit different color dots from being printed at the same position, is carried out.

A process to determine an on/off of the deep color dot is carried out in accordance with input tone data DS (step S120). Detail of the process to determine the on/off of the deep color dot is shown in Fig. 19 showing a deep color dot forming judging process routine. The routine carries out

a process to generate deep level data Dth (step S122) on the basis of the tone data DS, while referring to the table shown in Fig. 16. Fig. 20 is a table used for determining the recording rates of the light color ink and the deep color ink for the tone data of an original image. The tone data takes any of values 0 to 255 for each color (8 bits wide). Therefore, the size of the tone data is expressed as 16/255, for example. The table of Fig. 20 shows characteristics of the dot recording rates when the input data is perfectly coincident with the print result. In actual printers, a perfect proportional relationship is not present between the input data and the print result since a dot gain of ink (the print result is deeper than the input data because of such factors as ink droplet diameter and a spread of ink) is present. An operation to correct the input/output characteristic is a γ correction. γ correction data of the printer 20 of the present embodiment is shown in Fig. 21. A relationship of the input data vs. dot recording rate obtained when the γ correction shown in Fig. 21 is taken into consideration is shown in Fig. 22. Fig. 22 shows a rate of deep color ink and light color ink on a printed matter actually gained.

In the present embodiment, as will be described later, an on/off of the deep color dot is determined by a Dither method, and then an on/off of the light color dot is determined by an error diffusion method. The color dot on/off determining method of the embodiment is not such a method that for tone data, a recording rate of deep color ink and a recording rate of light color ink are uniquely given, and an on/off of the dot by the deep color ink or light color ink for a target pixel is determined. This relation will briefly be described. In the present embodiment, as shown in Fig. 18, an on/off of the deep color dot is first determined by using the table (step S120), and an on/off of the light

- 37 -

color dot is then determined while referring to the
determining result of the deep color dot (step S140). An
on/off of a light color dot is determined on the basis of the
following light color dot data Dx. The data Dx is given by

$$Dx = Dth \cdot Z/255 + Dtn \cdot z/255$$

In the above expression, Dtn is light color dot data obtained
from the tone data DS by using the graph of Fig. 20. Z is an
evaluation value when the deep color dot is on, and z is an
evaluation value when the light color dot is on. Dx is the
sum of the values that are obtained by multiplying the
evaluation values of the light and deep color dots by
weighting coefficients. Thus, the data to determine the
on/off of the light color dot is not the light color dot data
but the data Dx resulting from the data of the light and deep
color dots. The evaluation value Z when the deep color dot
is on, or formed can be considered as the lightness value,
255, and then the above expression is rearranged into

$$Dx = Dth + Dtn \cdot z/255.$$

The evaluation value z of the light color dot is smaller than
the evaluation value Z of the deep color dot. In the present
embodiment, $z = 160$.

Let us continue the description on the determining of
the on/off of the deep color dot. Deep level data Dth (the
ordinate on the right-hand side in Fig. 22) corresponding to
a recording rate of a predetermined deep color ink is
obtained on the basis of input tone data DS, while referring
to the Fig. 18 table. In a case where input cyan tone data
prints a sold area of 50/256, the recording rate of the cyan
ink Cl as deep color ink is 0%, and the deep level data is
also 0. In a case where tone data prints a solid area of
192/256, the cyan ink Cl as deep color ink is 6% and the deep
level data Dth is 15. In a case where tone data prints a
solid area of 245/256, the cyan ink Cl is 75% and the deep
level data Dth is 191. When the on/off of the light color

dot is determined by a method to be given later, the recording rates of the light cyan ink C2 as light color ink are 6%, 58% and 0%.

Whether or not the thus obtained deep level data Dth is larger than a threshold value Dref1 is determined (step S12 in Fig. 19). The threshold value Dref1 is a value indicating whether or not a deep color dot is to be formed at a target pixel, and may simply be set at approximately 1/2 of the deep level data Dth. In the present embodiment, a threshold matrix of the dispersion type dither is employed to determine this threshold value. Particularly, an ordered dither method is employed using a large matrix (blue noise matrix) of about 64 x 64. Therefore, the threshold value Dref1 to determine the on/off of the deep color dot is different for each target pixel. The concept of the threshold value in the ordered dither method is shown in Fig. 23. In Fig. 23, a matrix of 4 x 4 is used for ease of explanation. In the present embodiment, a large matrix of 64 x 64 is used, and threshold values (0 to 255) are selected so that their occurrence is uniform in any of the regions of 16 x 16 within the matrix. Use of such a large matrix suppresses the occurrence of a pseudo contour, for example. In the dispersion type dither, a spatial frequency of dots determined by the threshold matrix is high, and dots dispersedly appear within the region. A threshold matrix of the Beyer type, for example, is known for the dispersion type dither. Where the dispersion type dither is used, deep color dots dispersedly appear. Therefore, a distribution of dots over the region is not deviated, improving the image quality. Another suitable method, for example, a density pattern method or a pixel distribution method, may be used to determine the on/off of the deep color dot.

When the deep level data Dth is larger than the threshold value Dref1, it is determined that the deep color

dot is to be in an on state, and a process to compute a result value RV is carried out (step S126). The result value RV corresponds to a value (deep color dot evaluation value) corresponding to an optical density of the pixel. When it is determined that the deep color dot is on, that is, a dot by high color density ink is formed on the pixel, a value (e.g., 255) corresponding to the density of the pixel is set. The result value RV may be a fixed value, and if necessary, a function of the deep level data Dth.

When the deep level data Dth is smaller than the threshold value Drefl, it is determined that the deep color dot is off, that is, it is not formed, and 0 is substituted into the result value RV (step S128). In an area where the dot of high color density ink is not formed, a white background of the paper is left. It is for this reason that the result value RV is set to 0.

Following the determining of the on/off of the deep color dot and the process (step S120 in Fig. 18) to compute the result value RV, a process is carried out which obtains corrected data DC as the sum of tone data DS of the current target pixel and a diffusion error ΔDu derived from the already processed pixel located near to the former (step S125). This is done for carrying out a process of an error diffusion by using the light color dot. To perform the printing based on the error diffusion, a related error component is read out and applied to the pixel which will undergo the printing since a color shade error caused in the already processed pixel is weighted and allotted to the pixels located around the processed pixel. How the color shade error is weighted and allotted to the pixels around a target pixel PP is shown in Fig. 24. As shown, given weights (1/4, 1/8, 1/16) are applied to the density error, and the weighted ones are allotted to several pixels subsequent to the target pixel PP in the scanning direction of the carriage

30, and several pixels located behind the target pixel PP in the transport direction of the paper P.

After the corrected data DC is obtained, it is determined whether or not the deep color dot is put in an on state (a dot is formed by the cyan ink C1) (step S130). If the deep color dot is not formed, a process to determine the on/off of a dot of low color density, or a dot by the light cyan ink C2 (referred to a light color dot) (step S140) is carried out. A process to determine the on/off of the light color dot will be described with reference to Fig. 25 showing a light color dot forming determining process routine. In the process to determine the on/off of the light color dot, an error diffusion method is applied to the formation of a dot by the light cyan ink C2 in the embodiment, and it is determined whether the corrected data DC corrected on the basis of the concept of the error diffusion is larger or smaller than a threshold value Dref2 (step S144). The threshold value Dref2 is a value indicating whether or not a light color dot is to be formed at a target pixel, and may simply be fixed, but in the embodiment, it is variable, which is varied in accordance with the corrected data DC. A relationship between the threshold value Dref2 and the corrected data DC is shown in Fig. 26. As shown, the threshold value Dref2 is handled as a function of the corrected data DC to be judged. Such a handling suppresses a delay of the dot formation near the lower or upper limit of a tone, and an irregularity (called a trailing) of a dot formation that will occur in a fixed range in the scanning direction when a tone abruptly changes in an image area.

If the corrected data DC is larger than the threshold value Dref2, it is determined that a light color dot is put in an on state, and a result value RV (light color dot evaluation value) is computed (step S146). For the result value RV, its reference value is set at 122 in the

embodiment, and the result value is corrected by the
corrected data DC, but may be a fixed value. If the
corrected data DC is smaller than the threshold value Dref2,
it is determined that the light color dot is put in an off
state, and a process to set the result value RV to 0 is
carried out. There are many methods to determine the result
value RV. In an example of the method, a deep color dot is
determined by the deep level data Dth, and a light color dot
is determined by using the input tone data DS.

Following the determining of the on/off of the light
color dot and the process (step S140 in Fig. 18) to compute
the result value RV, a process to compute an error is carried
out (step S150). An error is obtained by subtracting the
result value RV from the corrected data DC. Where neither
the deep color dot nor the light color dot is formed, the
result value RV has been set to 0, and the corrected data DC
is incorporated into an error ERR. That is, since a density
to be achieved for the pixel is not obtained, its density is
computed and output as an error. Where the deep color dot or
the light color dot is formed, the result value RV
corresponding to the dot formed is substituted into it, and a
difference between it and the corrected data DC upon which
the judgement is made is an error ERR.

An error diffusion process is performed (step S160).
The error obtained in the step S150 is diffused by applying
given weights (Fig. 24) to the pixels located near the target
pixel. After the process thus far described is completed, the
process subsequent to the step S100 is applied again to the
next pixel.

The light color dot and the deep color dot are
recorded in this way. Models of the recording of those dots
by the cyan ink C1 and the light cyan ink C2 are illustrated
in Fig. 27. In a region where the input tone data is low
(the tone data is 0/256 to 175/256 in this embodiment), as

- 42 -

shown in Figs. 27(a) and 27(b), only dots by the light cyan ink C2 are formed, and the number of the light color dots present within a given region increases as the tone data goes high.

In a region where the tone data exceeds a predetermined value (175/256 or larger in this embodiment), as shown in Fig. 27(c), the number of the light color dots increases and the recording of the deep color dot starts and its number gradually increases. In a region where the tone data goes more high (exceeds 192/256 or larger), as shown in Figs. 27(d) and 27(e), the number of the deep color dots increases while the number of the light color dots is decreased.

In a region where the tone data goes further high (242/256 or larger), no further formation of the light color dot is performed, and as shown in Figs. 27(f) and 27(g), only the deep color dots are formed. When the tone data reaches its maximum value, as shown in Fig. 27(h), the recording rate of the deep color dots is 100%, and in this state, the surface of the paper P is entirely printed by the deep color ink (cyan ink C1).

As seen from the foregoing description, in the present embodiment, whether or not a dot by deep color ink is to be formed is first determined, and then a result value RV are determined on the basis of the on/off of the deep color dot. Thereafter, only when it is determined that the deep color dot is not formed, it is determined whether or not a dot by light color ink is formed, and a result value RV is determined on the basis of the on/off of the light color dot. The ordered dither method is used for the judgement on the deep color dot, and the error diffusion method is used for the judgement on the light color dot. As a result, a density of an image to be printed is adjusted so as to minimize an error by the on/off of the light color dot. Further, the

judgement on the deep color dot is first made. Because of this, the deep color dots are distributed without giving rise to any unnatural feeling and their distribution is excellent in graduation expression by properly setting the relationship between the input data and the deep level data Dth in the Fig. 20 table.

Also in the embodiment, it is noted that the color ink heads 61 to 66 of the print head 28, i.e., the black ink BK head, cyan ink C1 head, light cyan ink C2 head, magenta ink M1 head, light magenta ink M2 head, and yellow ink Y head, are arranged in this order when viewed in the printing direction. Therefore, the thus ordered print head arrangement brings about the following useful advantages. In the print heads thus arranged, ink that is first ejected and forms a dot on the paper with the movement of the carriage 30 is the black ink (BK), then cyan inks (C1 and C2) and the magenta inks (M1 and M2) are ejected, and finally the yellow ink (Y) is ejected. Color ink later ejected onto the paper spreads into the ink already forming a dot, but the ink that is already ejected and spread into the paper does not spread.

Accordingly, in the present embodiment, a single dot of the cyan ink C1 or the light cyan ink C2 or discrete dots of a color of a family of cyan are formed before the dots of the magenta ink M1 or the light magenta ink M2 are formed. Therefore, it never happens that the ink of a cyan family color spreads into the ink of any of the remaining colors. An expansion of the cyan family color dot, which is loud, is suppressed, and a grainiess of the cyan family color dot is lessened. This results in an improvement of a color reproduction on the printed matter. The reason why a graininess of the cyan dot is greater than of the magenta dot and the yellow dot will be estimated as described hereunder.

The spectral characteristics of the coloring materials, such as pigments and dye, that may be used for the color inks of the current ink jet printers, are shown in Fig. 28. Coloring material of yellow having, as shown, a substantially ideal spectral characteristic is commercially available. The magenta coloring material, commercially available, has a spectral characteristic component that is contained in the spectral characteristic of the yellow coloring material. The cyan coloring materials, now marketed, are only those having more unnecessary spectral characteristic components and being close in nature to black coloring materials. When those inks are used, care must be taken when a graininess on the printed matter is reduced.

For this reason, in forming a pattern consisting of a cyan dot C and a plural number of magenta dots M located around the cyan dot C as shown in Fig. 29A, when the magenta dots M are formed after the cyan dot C is formed, the inks of the cyan dots M spread into the cyan dot C that is still wet. The magenta dots M expand their areas, but the cyan dot C that tends to provide a graininess does not spread into the magenta dots M. Therefore, the cyan dot is unobtrusive.

This is well understood when comparing the graininess of the dot patterns shown in Figs. 29A and 29B which are formed in different cyan and magenta recording orders.

In a state that the inks of dots are still wet, if a dot is formed at a spot surrounded by those dots already formed, the new dot more spreads under influence by the old dots and becomes obtrusive. This tendency is remarkable when the cyan dot that is more obtrusive than the magenta dot spreads.

In case where magenta dots M are formed around a cyan dot C already formed as shown in Fig. 29A, if one cyan dot C is formed and then the magenta dots M are formed around the cyan dot C, the cyan dot C does not spread into the magenta

dots M located therearound. In a case where a magenta dot M is formed at a spot surrounded by cyan dots C already formed as shown in Fig. 29B, the magenta dot M spreads out to the cyan dots C that are imperfectly dried. In this case, if the magenta dot M spreads out, it presents a less graininess since the cyan ink is less obtrusive than the magenta ink.

Let us consider a case where the order of the recording of the color dots is reversed, viz., the magenta dot M is first printed and then the cyan dot C is printed. In the Fig. 29A pattern, the cyan dot C spreads out to the magenta dots M already formed therearound under influence of the wet magenta dots M. An area of the cyan dot C expands and the presence of the obtrusive cyan dot C increases, and the cyan dot C is more obtrusive. In the Fig. 29B pattern, the cyan color occupies a large area. If the cyan dot C somewhat expands toward the magenta dot M, the whole area of the cyan dots a little changes. At this time, the area of the magenta dot M does not expand, and hence presents no graininess.

In printing a pattern where a cyan dot is located at the central spot of a plural number of magenta dots, viz., the Fig. 29A pattern, it is essential to prevent the cyan ink C from spreading out to the dots surrounding the former, in order to reduce the graininess. The same thing is true for the combination of the light cyan ink and the light magenta ink.

The combination of two inks, the deep cyan ink C1 and the deep magenta ink M1, were discussed. The graininess can be evaluated by using two patterns of Figs. 29A and 29B also when four kinds of color inks, or the inks of cyan ink C1, light cyan ink C2, magenta ink M1 and light magenta ink M2, are combined.

Turning now to Fig. 30, there is a table showing the relationships between the color orders that will

theoretically exist ("Color Orders Allowing Patterns to Exist" in Table 1) and a degree of graininess ("Graininess Results" in Table 1) when patterns (patterns in Figs. 29A and 29B) each consisting of a single dot and a plural number of dots surrounding the single dot by using the deep and light cyan inks C1 and C2, and the deep and light magenta inks M1 and M2 are formed.

As stated above, a print pattern having the highest graininess is formed by printing dots by the deep magenta ink M1 and then printing a dot by the deep cyan ink C1 at the spot surrounded by the magenta dots already printed. Such color orders, theoretically estimated, are a pattern of M1, C1, M2, C2 and a pattern of M1, M2, C1, C2 (M1: magenta ink, M2: light magenta ink, C1: cyan ink, and C2: light cyan ink).

In the printing by using two light and deep color inks, two light and deep color inks are always used, and there is no case where only one deep or light color ink is used. In actual printing, the hatched patterns in Fig. 30 ("Patterns Rejected by Signal Processings" in the figure) are not used since the signal processings reject such patterns.

Of the patterns used for printing, the color order whose graininess is considerably high is a No. 5 pattern, which consists of a dot by the light cyan ink C2 and dots by the magenta ink M1 surrounding the cyan ink dot.

In the present embodiment, the dots are formed in the order of the cyan ink C1, light cyan ink C2, magenta ink M1, and light magenta ink M2. Accordingly, a No. 2 pattern is formed in a manner that a single dot by the light cyan ink C2 is first formed, and then dots by the magenta ink M1 are formed. It is possible to prevent the dot by the light cyan ink C2 from spreading out, and to eliminate a graininess of the dot by the light cyan ink C2.

In the present embodiment, as shown in Fig. 16, for those color inks contained in the color ink cartridge 70b, the amount vy of the yellow ink (only one kind of yellow ink is used) is related to the amounts vc1, vc2, vm1 and vm2 of light and deep cyan and magenta inks as follows:

Vc1 < vy < Vc1 + vc2, and Vm1 < vy < vm1 + vm2.
When a natural picture or a graph painted with different monocolors are actually printed, those color inks are substantially uniformly used. There is no case where one ink is used up earlier than the remaining ones, and the color ink cartridge 70b must be replaced with a new one in a state that large amounts of the remaining inks are still left.

Among the amounts of three color inks in the color ink cartridge 70b, the following relations hold

vy ≤ 1.5·vc1 and vy ≤ 1.5·vm1.
Since the amounts of the cartridge or chamber-contained color inks are thus defined, when various pictures about a natural picture are printed, it never happens that one specific ink is used up while sufficient amounts of the remaining inks are still left in the ink cartridge.

The reason for this may be explained by using Fig. 22. Fig. 22 shows variations of the actual recording rates of the different color dots of different densities with respect to input data. Here, it is assumed that a density distribution of an image to be printed is substantially uniform in average at a value between 0 and 255. On this assumption, the amounts of the inks consumed for printing the image to be printed correspond to the results of integrating the variations of the recording rates in the graph. In the printer 20 of the present embodiment, the dot recording rates of the individual inks after γ-correction are set to be low as a whole with respect to the input data. However, it is apparent that the amount of consumed yellow ink Y as the ink of the highest lightness, is much larger than of the cyan ink

- 48 -

Cl (vcl < vy). Let us consider the relationship between the total amount of light and deep cyan and magenta inks and the amount of yellow ink. If only the deep magenta or cyan ink is used, it must be only needed that its amount is equal to that of the yellow ink. Actually, the light magenta ink M2 and the light cyan ink C2 are used in a region where the input data is low, however. In this region, the magenta ink M1 or the cyan ink C1 is replaced with the light magenta ink or the cyan ink or the amount of consumed magenta or cyan ink is reduced. When light color ink is used for printing, the amount of ink consumed for obtaining the same color density is increased. Therefore, the total amount of magenta inks, vm1 + vm2, is larger than the total amount of yellow ink Y, vy (vy < vm1 + vm2, vy < vc1 + vc2).

In the present embodiment, the amount of yellow ink contained in the color ink cartridge is 28g, and the amounts of light and deep magenta and cyan are each 20g. These figures satisfy the above-mentioned relations:

vm1 < vy, vc1 < vy

vy < vm1 + vm2, vy < vc1 + vc2

vy ≤ 1.5·vc1, vy ≤ 1.5·vm1.

When the amounts of the chamber-contained magenta and cyan inks of low and high densities are thus selected for the amount of chamber-contained yellow ink of the highest lightness, the proper amounts of the chamber-contained inks are obtained without useless consumption of inks.

In the embodiment mentioned above, cyan and magenta inks consumed each consist of two kinds of inks, low and high densities. If these inks each consists three or more kinds of inks, the yellow ink may consist of different kinds of inks. An example of the latter case is tabulated in Fig. 31. As shown, the yellow ink consists of two kinds of inks of low and high densities (normal yellow ink Y1 and light yellow ink Y2). The cyan ink consists of three kinds of inks (high,

medium, and light cyan inks C1, C2 and C3). The magenta ink also consists of three kinds of inks (magenta inks M1, M2 and M3 of high, medium, and low color densities). As seen from the table, the amounts of those color inks are mathematically given by

$$vy1 + vy2 < vm1 + vm2 + vm3$$
$$vy1 + vy2 < vc1 + vc2 + vc3$$
$$vm1 < vy1 < vm1 + vm2 \text{ and } vc1 < vy1 < vc1 + vc2$$
$$vm2 < vy2 < vm2 + vm3 \text{ and } vc2 < vy2 < vc2 + vc3$$
$$vy1 \le 1.5 \cdot vm1 \text{ and } vy1 \le 1.5 \cdot vc1$$
$$vy2 \le 1.5 \cdot vm2 \text{ and } vy2 \le 1.5 \cdot vc2$$

Also in this case, the amounts of those color inks consumed for the input data of a normal image are substantially equal, and unnecessary waste of inks is minimized.

In the light of the amounts of the cartridge or chamber-contained inks, those inks may be contained in various manners. Those inks may be contained in a single ink cartridge 70 as shown in Fig. 5. The high and low color density inks may be contained for each color in a container. The color inks may be contained for each color density in one ink cartridge. The color inks may be contained in ink cartridges, respectively. The colors of the color inks are not limited to C, M, Y and K colors, but may be any other suitable color combination. For special colors, for example, gold and metal, two or more kinds of color inks of different densities may be used. In this case, the amounts of the chamber-contained color inks are determined so that the amount of color ink of the highest lightness and the amounts of other color inks satisfy the above-mentioned relations.

When the color density of the color ink is different every color, it is desirable to convert these different color densities into a color density and to use the above-mentioned ink-amount determining method in determining the amounts of the chamber-contained color inks. The yellow ink has a large

lightness value than the cyan and magenta, and a little
suffers from the graininess problem. Therefore, the color
density of the yellow is selected to be higher than that of
each of the remaining ones, cyan and magenta. In this case,
since the amount of consumed yellow ink may be reduced, it is
necessary to determine the amount of chamber-contained yellow
ink, allowing for a deviation of the color density. In a
case where a color density of the yellow ink is α% higher
than of the remaining ones, and a consumption of the yellow
ink is reduced by decreasing the recording rate of the yellow
ink by an amount corresponding to α%, the amount vm1 of the
chamber-contained magenta ink, the amount vm2 of the chamber-
contained light magenta, the amount vc1 of the chamber-
contained cyan ink, the amount vc2 of the chamber-contained
light cyan ink, and the amount vy of the chamber-contained
yellow ink are defined by

$$(1 + \alpha/100) \cdot vy < vc1 + vc2, \text{ and}$$
$$(1 + \alpha/100) \cdot vy < vm1 + vm2$$

Further,

$$vc1 < (1 + \alpha/100) \cdot vy, \text{ and}$$
$$vm1 < (1 + \alpha/100) \cdot vy.$$

Furthermore, it is preferable that the following relations
hold

$$(1 + \alpha/100) \cdot vy \leq 1.5 \cdot vc1, \text{ and}$$
$$(1 + \alpha/100) \cdot vy \leq 1.5 \cdot vm1.$$

While the constructions and operations of the ink
cartridge and the printer constructed according to the
present invention have been described at various angles, it
should be understood that the present invention is not
limited to those embodiments but may variously be changed,
modified, and altered within the scope and spirits of the
appended claims. In the embodiments, for ejecting both high
and low color density inks, the piezoelectric elements PE are

- 51 -

used and voltages of given widths are applied to the piezoelectric elements PE. Any of other suitable ink jetting systems may be used, as a matter of course. The ink jetting systems currently available may be categorized into an ink jetting system in which ink droplets are separated from a continuous stream of ink, and an on-demand system, employed in the above-mentioned embodiments. The first ink jetting system includes a charging modulation system in which ink droplets are separated from a jet stream of ink by a charging modulation, and a micro-dot system which uses for printing fine satellite droplets generated when ink droplets of large diameters are separated from the ink jet stream. These systems may be applied to the printing device of the invention which uses color inks of different color densities.

In addition to the ink jetting system using the piezoelectric elements, the on-demand system further includes an ink jetting system as shown in Figs. 32A o 32E. In this system, heating elements HT are located near the ink nozzles NZ. Ink bubbles BU are generated by heating ink by the heating elements HT. Pressure caused at the ink bubble generation is utilized for ejecting ink droplets IQ. The on-demand ink jetting system may also be applied to the printing device of the invention which uses plural kinds of color inks.

WHAT IS CLAIMED IS:

1. An ink cartridge containing inks for printer
wherein at least three ink chambers for containing inks are
formed by partitioning the inner space of said ink cartridge,
the volume of one ink chamber being different from the
volumes of the remaining ones, and ink supply ports
communicatively connected to said ink chambers by way of ink
passages are arrayed on the bottom of a main body of said ink
cartridge in association with said ink chambers,
respectively.

2. The ink cartridge according to claim 1, in which
said ink supply ports are equidistantly arrayed in a given
direction.

3. The ink cartridge according to claim 2, in which
said ink chambers of three or more are arranged in the
direction of transporting said ink cartridge, the difference
of the volume of said one ink chamber from those of the
remaining ones is realized by the width difference of said
one ink chamber, and said given direction in which said ink
supply ports are arrayed is the ink cartridge transporting
direction.

4. The ink cartridge according to claim 1, in which
said ink chamber of the different volume is located at the
end of said ink cartridge.

5. The ink cartridge according to claim 4, in which
said ink chamber of the different volume contains yellow ink.

6. The ink cartridge according to claim 1, in which
said ink chambers are five in number and contain magenta ink,
light magenta ink whose color density is lower than magenta,

cyan ink, light cyan ink whose color density is lower than cyan, and yellow ink, and said ink chamber containing yellow ink is located at the trailing end of the series of said ink chambers when viewed in the cartridge transporting direction.

7. The ink cartridge according to claim 6, in which said ink chambers are arranged in the order of the cyan ink chamber, light cyan ink chamber, magenta ink chamber, light magenta ink chamber, and yellow ink chamber when viewed in the cartridge transporting direction.

8. The ink cartridge according to claim 1, in which said ink supply ports includes each a cylindrical fitting part fit to the inner surface of said ink supply port, a thin, cylindrical flexible part extended from said fitting part toward said ink chamber associated therewith while being substantially parallel to said fitting part, and an elastic sealing part being extended upward from said flexible part while being protruded inward, said elastic sealing part liquid tightly receiving an ink supply needle to be inserted into said ink supply port associated therewith.

9. The ink cartridge according to claim 8, in which a tapered guide surface for guiding said ink supply needle is provided ranging from the bottom of said fitting part to said flexible part.

10. The ink cartridge according to claim 8, in which said elastic sealing part is formed protruding from the inner surface of said flexible part through said tapered guide surface for guiding said ink supply needle.

11. The ink cartridge according to claim 1, in which said ink chambers of three or more are partitioned by

partitioning walls, a lid is provided covering the openings of said ink chambers, said chambers having said openings formed in the sides thereof closer to said ink supply ports, a plural number of reinforcing horizontal ribs are raised from the inner surface of said lid while being extended in the longitudinal direction of said ink chambers and located corresponding to said ink chambers, a part of each of said ribs closer to each of said ink supply ports being higher than the remaining part thereof.

12.   The ink cartridge according to claim 1, in which said ink chambers of three or more contain the whole or independently at least some of $\underline{m}$ (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm for each hue, and $\underline{n}$ (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn whose lightness values are larger than of said color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of said $\underline{m}$ kinds of chamber-contained color inks and the amounts vyi ($1 \leq i \leq n$) of said $\underline{n}$ kinds of color inks having large lightness values satisfy the following relation,

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk$$

and the amount of the deepest color ink, chamber-contained, of said $\underline{n}$ kinds of color inks having the large lightness values is larger than the amount of the deepest color ink, chamber-contained, of said $\underline{m}$ kinds of color inks.

13.   The ink cartridge according to claim 12, in which said color ink whose lightness value is larger than of the remaining color inks is yellow ink.

14. The ink cartridge according to claim 12, in which said ink cartridge stores the cyan and magenta inks each consisting of at least two kinds of color inks for m kinds of light and deep color inks, and the color ink consisting of only yellow color in for n kinds of color inks.

15. The ink cartridge according to claim 12, in which the amounts of said m kinds of light and deep color inks contained in said ink chambers thereof and the amounts of said n kinds of color inks contained in said ink chambers thereof are determined in consideration with γ-characteristics of said color inks.

16. The ink cartridge according to claim 1, in which said ink chambers of three or more contain the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of said color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of said m kinds of color inks contained in said ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of said n kinds of color inks having large lightness values contained in said ink chambers thereof satisfy the following relation
vxi < vyi (i : integer between 1 and n).

17. The ink cartridge according to claim 16, in which
vyi $\leq$ 1.5·vxi.

18. The ink cartridge according to claim 16, in which said color ink whose lightness value is larger than of the remaining color inks is yellow ink.

19. The ink cartridge according to claim 16, in which said ink cartridge stores the cyan and magenta inks each consisting of at least two kinds of color inks for m kinds of light and deep color inks, and the color ink consisting of only yellow color in for n kinds of color inks.

20. The ink cartridge according to claim 16, in which the amounts of said m kinds of light and deep color inks contained in said ink chambers thereof and the amounts of said n kinds of color inks contained in said ink chambers thereof are determined in consideration with γ-characteristics of said color inks.

21. The ink cartridge according to claim 1, in which said ink chambers of three or more contain the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of said color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of said m kinds of color inks contained in said ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of said n kinds of color inks having large lightness values contained in said ink chambers thereof satisfy the following relations,

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \qquad (n<m)$$

and

vxi < vyi < vxi + vxi+1 (i : integer between 1 and (n-1)).

22. The ink cartridge according to claim 1, in which said ink chambers are six in number and contain black ink, deep cyan ink, light cyan ink, deep magenta ink, light magenta ink, and yellow ink, and said six ink supply ports provided in association with said six ink chambers are linearly arrayed in the direction of transporting said ink cartridge, said ink supply ports being arrayed in the order of black, deep cyan, light cyan, deep magenta, light magenta, and yellow.

23. A printing device having a head for ejecting at least two kinds of light and deep color inks and a color ink whose lightness value is larger than of said light and deep color inks for the same recording rate, said printing device printing an image in the form of a distribution of dots by said color inks, said printing device comprising:

an ink cartridge including ink chambers for containing inks are respectively formed for said color inks by partitioning the inner space of said ink cartridge, the volume of said ink chamber containing said color ink whose lightness value being larger than of said light and deep color inks for the same recording rate;

input means for inputting a tone signal of an image to be formed;

dot-formation determining means for determining the formation of dots by said $\underline{m}$ kinds of light and deep color inks for each hue and said ink having the larger lightness value in accordance with input tone signal; and

head drive means for causing said color inks contained in said ink chambers of said ink cartridge to eject from said head by controlling said head in accordance with the result of the dot formation determined by said dot-formation determining means.

24. The printing device according to claim 23, in which said ink cartridge contains the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn whose lightness values are larger than of said color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk ($1 \leq k \leq m$) of said m kinds of color inks contained in said ink chambers thereof and the amounts vyi ($1 \leq i \leq n$) of said n kinds of color inks having large lightness values contained in said chambers thereof satisfy the following relation

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \quad (n<m)$$

and the amount of the deepest color ink, chamber-contained, of said n kinds of color inks having the large lightness values is larger than the amount of the deepest color ink, chamber-contained, of said m kinds of color inks.

25. The printing device according to claim 23, in which said ink cartridge contains the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of said color inks X1,

- 59 -

X2, ..., Xm for the same recording rate, and the amounts vxk (1 ≤ k ≤ m) of said m kinds of color inks contained in said ink chambers thereof and the amounts vyi (1 ≤ i ≤ n) of said n kinds of color inks having large lightness values satisfy the following relation

vxi < vyi (i : integer between 1 and n).

26. The printing device according to claim 25, in which

vyi ≤ 1.5·vxi. (i : integer between 1 and n)

27. The printing device according to claim 23, in which said ink cartridge contains the whole or independently at least some of m (m : natural number of 2 or larger) kinds of light and deep color inks X1, X2, ..., Xm (the inks become thin in color density in this order) for each hue, and n (n : natural number of 1 or larger) kinds of color inks Y1, ..., Yn (the inks become thin in color density in this order) whose lightness values are larger than of said color inks X1, X2, ..., Xm for the same recording rate, and the amounts vxk (1 ≤ k ≤ m) of said m kinds of color inks contained in said ink chambers thereof and the amounts vyi (1 ≤ i ≤ n) of said n kinds of color inks having large lightness values contained in said chambers thereof satisfy the following relations

$$\sum_{i=1}^{n} vyi < \sum_{k=1}^{m} vxk \qquad (n<m)$$

and

vxi < vyi < vxi + vxi+1 (i : integer between 1 and (n-1)).

28. The printing device according to claim 23, in which said color ink whose lightness value is larger than of the remaining color inks is yellow ink.

29. The printing device according to claim 23, in which of said $\underline{m}$ kinds of light and deep color inks, the magenta ink and cyan ink each consist of two kinds of inks, and of said $\underline{n}$ kinds of color inks, the yellow ink consists of one kind of ink.

30. The printing device according to claim 23, in which the amounts of said $\underline{m}$ kinds of light and deep color inks contained in said ink chambers thereof, and the amounts of said $\underline{n}$ kinds of color inks contained in said ink chambers thereof are determined in consideration with γ-characteristics of said color inks.

31. The printing device according to claim 23, in which said printing device is an ink jet printing device, said head is a print head having at least six series of nozzle orifices for independently ejecting ink droplets of black, deep cyan, light cyan, deep magenta, light magenta, and yellow, and control means for causing said print head to eject, in accordance with image signals, ink droplets to form dots each forming one pixel by black ink, deep cyan ink, light cyan ink, deep magenta ink, light magenta ink, and yellow ink in this order.

The Patent Office

Application No: GB 9716371.1   **Examiner:** Gary Williams

Claims searched: 1-22   **Date of search:** 16 October 1997

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

    UK Cl (Ed.O): B6F: FLR

      Int Cl (Ed.6): B41J: 2/175

Other:

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2301064 A (HEWLETT-PACKARD) See Fig.6, page 7 lines 14-15, page 9 lines 17-29, Table 1 page 10 lines 15-19	1,2

— 62 —

X	Document indicating lack of novelty or inventive step	A Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E Patent document published on or after, but with priority date earlier than, the filing date of this application.

An Executive Agency of the Department of Trade and Industry